

# Tapered Roller Bearings



# Table of Contents

## Metric Tapered Roller Bearings

Nomenclature .....	Page E-1
Interchange .....	Page E-2
Applications.....	Page E-2
30200 Metric Series .....	Page E-3
30300 Metric Series.....	Page E-5
31300 Metric Series.....	Page E-7
32000 Metric Series .....	Page E-9
32200 Metric Series.....	Page E-11
32300 Metric Series.....	Page E-13
32900 Metric Series .....	Page E-15
33000 Metric Series .....	Page E-17
33100 Metric Series.....	Page E-19
33200 Metric Series.....	Page E-21
30200C Metric Series .....	Page E-23
30300C Metric Series.....	Page E-25
32200C Metric Series.....	Page E-27
32300C Metric Series.....	Page E-29

## Inch Tapered Roller Bearings

Nomenclature .....	Page E-31
Interchange .....	Page E-32
Applications.....	Page E-32
Inch Series.....	Page E-33

# Metric Tapered Roller Bearings



**Prefix**  
**HR:** High Capacity  
**Blank:** Normal Capacity

**HR**

**322**

**Series**

30200	32200
30300	32300
31300	32900
32000	33000
	33100
	33200

**Bore Size**

(04 and up: multiply last two numbers by 5 to get bore in mm)

**02:** 12 mm    **08:** 40 mm

**03:** 17 mm    **10:** 50 mm

**04:** 20 mm    **20:** 100 mm

Special bore sizes are as follows:

**/22:** 22 mm    **/32:** 32 mm

**/28:** 28 mm

**10**

**Interchangeability**

**J:** Cup Angle and Raceway Diameter Conform to ISO 355

**X:** Dimension Series 32000 and 32900 the Major Dimensions Conform to ISO 355

**C**

**J**

**Contact Angle**

**Blank:** Standard Angle = 15° to 17°

**C:** Medium Angle = 17° to 24°

**D:** Steep Angle = 24° and more

Please refer to the bearing tables for exact part number options

## Interchange

Description		Interchange			
		NSK	SKF	Timken	FAG
Part Number	High Capacity Design	HR	--	--	--
	Light	HR302xx	302xx	302xx	302xx
	Medium	HR303xx	303xx	303xx	303xx
	Medium, Steep Angle	HR313xx	313xx	313xx	313xx
	Extra Light, Wide	HR329xx	329xx	329xx	329xx
	Very Light, Wide	HR320xx	320xx	320xx	320xx
	Light, Wide	HR322xx	322xx	322xx	322xx
	Medium, Wide	HR323xx	323xx	323xx	323xx
	Very Light, Extra Wide	HR330xx	330xx	330xx	330xx
	Light, Extra Wide	HR331xx	331xx	331xx	331xx
	Medium, Extra Wide	HR332xx	332xx	332xx	332xx
Suffix	Medium Contact Angle	C	B	B	B
	Steep Contact Angle	D	--	--	--
	Modified Internal Design	X	X	X	X
	Conforms to ISO 355	J	--	--	A

\*HR313xx is directly equal to HR303xxD.

The competitive manufacturers are provided for a convenient source of unit substitution. They can be considered interchangeable in most instances, but for special applications, please contact NSK. NSK assumes no liability with respect to errors or omissions.

## Applications


Shown below are some common applications utilizing a tapered roller bearing design. The design allows for combinations of heavy radial and thrust loads with low to moderate speeds. This section covers only single row tapers although NSK manufactures a full line of two and four row tapers as well. For more details on multiple row tapered roller bearings, please contact an NSK representative.

Metric designs function the same as their inch series cousins, the difference lies in the units of measure. NSK metric tapers are standardly supplied with cup and cone together, while inch series bearing are available by the cup, cone, or cup and cone. The applications shown below are for either metric or inch bearings, with the equipment manufacturer choosing the preference of dimensional measurements. Metric tapers are usually found in equipment designed in Europe or Asia.

- › Guide Boxes in Bar and Rod Mills › Pumps and Compressors › Cranes and Hoists › Gears and Drives › Stamping Presses
- › Machine Tool Spindles › Bow Thrusts on Ships › Speed Reducers › Transmissions › Sheaves › Conveyor and Transfer Equipment
- › Construction Equipment › Mining Equipment › Oil Field Equipment › Automotive Front and Rear Axles › Plastic Forming Equipment
- › Agriculture Equipment › Motorcycle Wheels › Pinion Shafts of Differential Gears › Drum Shafts › Crankshafts › Crushers

# Tapered Roller Bearings: 30200 Metric Series

Bore Diameter 15 – 320 mm, 0.5906 – 12.5984 inch

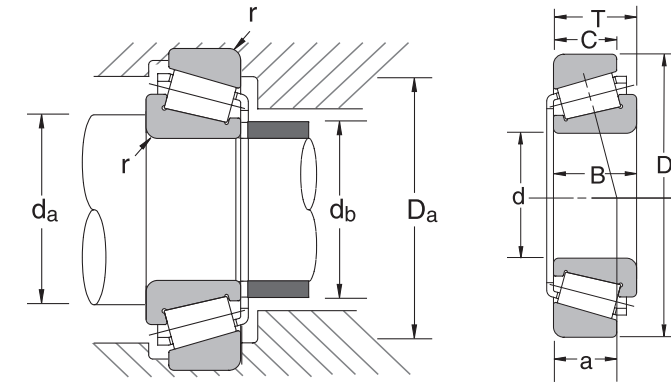

Bearing Number	Nominal Bearing Dimensions										Preferred Shoulder Diameters (in)			
	d		D		T		B		C		r*	da (min)	db (max)	Da (max)
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch				
30202	15	0.5906	35	1.3780	11.75	0.4626	11	0.4331	10	0.3937	0.02	0.906	0.748	1.181
30203j	17	0.6693	40	1.5748	13.25	0.5217	12	0.4724	11	0.4331	0.04	1.024	0.906	1.339
30204j	20	0.7874	47	1.8504	15.25	0.6004	14	0.5512	12	0.4724	0.04	1.142	1.063	1.614
30205j	25	0.9843	52	2.0472	16.25	0.6398	15	0.5906	13	0.5118	0.04	1.339	1.220	1.811
30206j	30	1.1811	62	2.4409	17.25	0.6791	16	0.6299	14	0.5512	0.04	1.535	1.457	2.205
30207j	35	1.3780	72	2.8346	18.25	0.7185	17	0.6693	15	0.5906	0.06	1.811	1.693	2.480
30208j	40	1.5748	80	3.1496	19.75	0.7776	18	0.7087	16	0.6299	0.06	2.008	1.890	2.795
30209j	45	1.7717	85	3.3465	20.75	0.8169	19	0.7480	16	0.6299	0.06	2.205	2.087	2.992
30210j	50	1.9685	90	3.5433	21.75	0.8563	20	0.7874	17	0.6693	0.06	2.402	2.283	3.189
30211j	55	2.1654	100	3.9370	22.75	0.8957	21	0.8268	18	0.7087	0.06	2.638	2.520	3.583
30212j	60	2.3622	110	4.3307	23.75	0.9350	22	0.8661	19	0.7480	0.06	2.835	2.717	3.976
30213j	65	2.5591	120	4.7244	24.75	0.9744	23	0.9055	20	0.7874	0.06	3.031	3.071	4.370
30214j	70	2.7559	125	4.9213	26.25	1.0335	24	0.9449	21	0.8268	0.06	3.228	3.189	4.567
30215j	75	2.9528	130	5.1181	27.25	1.0728	25	0.9843	22	0.8661	0.06	3.425	3.346	4.764
30216j	80	3.1496	140	5.5118	28.25	1.1122	26	1.0236	22	0.8661	0.08	3.740	3.583	5.118
30217j	85	3.3465	150	5.9055	30.50	1.2008	28	1.1024	24	0.9449	0.08	3.937	3.819	5.512
30218j	90	3.5433	160	6.2992	32.50	1.2795	30	1.1811	26	1.0236	0.08	4.134	4.055	5.906
30219j	95	3.7402	170	6.6929	34.50	1.3583	32	1.2598	27	1.0630	0.08	4.449	4.331	6.220
30220j	100	3.9370	180	7.0866	37.00	1.4567	34	1.3386	29	1.1417	0.08	4.646	4.567	6.614
30221j	105	4.1339	190	7.4803	39.00	1.5354	36	1.4173	30	1.1811	0.08	4.843	4.843	7.008
30222j	110	4.3307	200	7.8740	41.00	1.6142	38	1.4961	32	1.2598	0.08	5.039	5.079	7.402
30224j	120	4.7244	215	8.4646	43.50	1.7126	40	1.5748	34	1.3386	0.08	5.433	5.551	7.992
30226j	130	5.1181	230	9.0551	43.75	1.7224	40	1.5748	34	1.3386	0.10	5.945	5.945	8.504
30228j	140	5.5118	250	9.8425	45.75	1.8012	42	1.6535	36	1.4173	0.10	6.339	6.457	9.291
30230	150	5.9055	270	10.6299	49.00	1.9291	45	1.7717	38	1.4961	0.10	6.732	6.929	10.079
30232	160	6.2992	290	11.4173	52.00	2.0472	48	1.8898	40	1.5748	0.10	7.126	7.559	10.866
30234	170	6.6929	310	12.2047	57.00	2.2441	52	2.0472	43	1.6929	0.12	7.756	7.992	11.496
30236	180	7.0866	320	12.5984	57.00	2.2441	52	2.0472	43	1.6929	0.12	8.150	8.386	11.890
30238	190	7.4803	340	13.3858	60.00	2.3622	55	2.1654	46	1.8110	0.12	8.543	8.976	12.677
30240	200	7.8740	360	14.1732	64.00	2.5197	58	2.2835	48	1.8898	0.12	8.937	9.528	13.465
30244	220	8.6614	400	15.7480	72.00	2.8346	68	2.6772	54	2.1260	0.12	9.724	10.512	15.039
30248	240	9.4488	440	17.3228	79.00	3.1102	72	2.8346	60	2.3622	0.12	10.512	11.339	16.614
30252	260	10.2362	480	18.8976	89.00	3.5039	80	3.1496	67	2.6378	0.16	11.535	12.441	18.031
30256	280	11.0236	500	19.6850	89.00	3.5039	80	3.1496	67	2.6378	0.16	12.323	13.346	18.819
30260	300	11.8110	540	21.2598	96.00	3.7795	85	3.3465	71	2.7953	0.16	13.110	13.976	20.394
30264	320	12.5984	580	22.8346	104.00	4.0945	92	3.6220	75	2.9528	0.16	13.898	15.000	21.969

\*Maximum fillet which corner radius of bearing will clear.


Bearing Number	Basic Load Ratings (lbs)		Limiting Speeds (1000 RPM)		Effective Load Center (inches)	Bearing Weight Approx.
	Cr	Cor	Grease	Oil	a	lbs
30202	3530	3210	11.00	15.00	0.32	0.12
30203j	4520	4470	9.50	13.00	0.38	0.17
30204j	6270	6410	8.00	11.00	0.43	0.28
30205j	7190	7870	7.10	10.00	0.50	0.35
30206j	9670	10700	6.00	8.00	0.55	0.52
30207j	12100	13400	5.30	7.10	0.59	0.75
30208j	14300	15700	4.80	6.30	0.65	0.97
30209j	15400	17900	4.30	6.00	0.72	1.08
30210j	17100	20600	4.00	5.30	0.77	1.23
30211j	21200	25400	3.60	5.00	0.82	1.62
30212j	23400	27700	3.40	4.50	0.87	2.05
30213j	27400	33900	3.00	4.00	0.94	2.60
30214j	29700	36600	2.80	4.00	1.01	2.87
30215j	32100	40900	2.80	3.80	1.06	3.15
30216j	35300	43800	2.60	3.40	1.11	3.73
30217j	41400	52400	2.40	3.20	1.19	4.67
30218j	45200	57600	2.20	3.00	1.25	5.73
30219j	50100	64300	2.20	2.80	1.33	6.90
30220j	57300	74200	2.00	2.60	1.42	8.33
30221j	62900	82100	1.90	2.60	1.50	9.94
30222j	70800	94400	1.80	2.40	1.58	11.64
30224j	75300	101000	1.60	2.20	1.75	13.85
30226j	84300	114000	1.50	2.00	1.80	15.99
30228j	87700	116000	1.40	1.90	1.93	19.27
30230	109032	128000	1.30	1.70	1.98	23.59
30232	119149	137000	1.20	1.60	2.17	28.89
30234	141630	155000	1.10	1.50	2.35	35.50
30236	146126	156000	1.10	1.40	2.44	36.60
30238	160738	178000	1.00	1.30	2.47	44.32
30240	178723	200000	0.90	1.30	2.58	52.48
30244	182000	259000	0.85	1.10	2.94	74.09
30248	223000	315000	0.75	1.00	3.35	99.67
30252	268000	382000	0.67	0.90	3.72	133.84
30256	279000	427000	0.63	0.85	3.88	146.19
30260	324000	472000	0.60	0.80	4.14	177.72
30264	369000	544000	0.53	0.75	4.48	218.96

Cr = Dynamic Radial Load Rating

Cor = Static Radial Load Rating

# Tapered Roller Bearings: 30300 Metric Series

Bore Diameter 15 – 260 mm, 0.5906 – 10.2362 inch

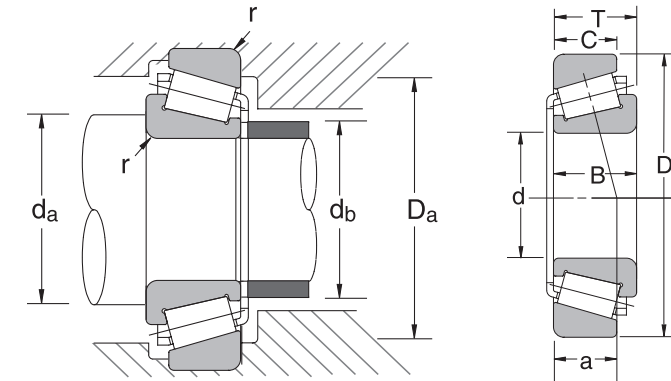

Bearing Number	Nominal Bearing Dimensions										Preferred Shoulder Diameters (in)			
	d		D		T		B		C		r*	d <sub>a</sub> (min)	d <sub>b</sub> (max)	D <sub>a</sub> (max)
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch				
30302	15	0.5906	42	1.6535	14.25	0.5610	13	0.5118	11	0.4331	0.04	0.945	0.866	1.417
30303	17	0.6693	47	1.8504	15.25	0.6004	14	0.5512	12	0.4724	0.04	1.024	0.945	1.614
30304	20	0.7874	52	2.0472	16.25	0.6398	15	0.5906	13	0.5118	0.06	1.220	1.063	1.732
303/22	22	0.8661	56	2.2047	17.25	0.6791	16	0.6299	14	0.5512	0.06	1.280	1.197	1.850
30305	25	0.9843	62	2.4409	18.25	0.7185	17	0.6693	15	0.5906	0.06	1.417	1.339	2.126
303/28	28	1.1024	68	2.6772	19.75	0.7776	18	0.7087	15	0.5906	0.06	1.535	1.457	2.323
30306	30	1.1811	72	2.8346	20.75	0.8169	19	0.7480	16	0.6299	0.06	1.614	1.575	2.480
303/32	32	1.2598	75	2.9528	21.75	0.8563	20	0.7874	17	0.6693	0.06	1.693	1.654	2.598
30307	35	1.3780	80	3.1496	22.75	0.8957	21	0.8268	18	0.7087	0.06	1.850	1.772	2.795
30308	40	1.5748	90	3.5433	25.25	0.9941	23	0.9055	20	0.7874	0.06	2.047	2.047	3.189
30309	45	1.7717	100	3.9370	27.25	1.0728	25	0.9843	22	0.8661	0.06	2.244	2.283	3.583
30310	50	1.9685	110	4.3307	29.25	1.1516	27	1.0630	23	0.9055	0.08	2.559	2.559	3.937
30311	55	2.1654	120	4.7244	31.50	1.2402	29	1.1417	25	0.9843	0.08	2.756	2.795	4.331
30312	60	2.3622	130	5.1181	33.50	1.3189	31	1.2205	26	1.0236	0.10	3.071	3.031	4.646
30313	65	2.5591	140	5.5118	36.00	1.4173	33	1.2992	28	1.1024	0.10	3.268	3.268	5.039
30314	70	2.7559	150	5.9055	38.00	1.4961	35	1.3780	30	1.1811	0.10	3.465	3.504	5.433
30315	75	2.9528	160	6.2992	40.00	1.5748	37	1.4567	31	1.2205	0.10	3.661	3.740	5.827
30316	80	3.1496	170	6.6929	42.50	1.6732	39	1.5354	33	1.2992	0.10	3.858	4.016	6.220
30317	85	3.3465	180	7.0866	44.50	1.7520	41	1.6142	34	1.3386	0.10	4.173	4.252	6.535
30318	90	3.5433	190	7.4803	46.50	1.8307	43	1.6929	36	1.4173	0.10	4.252	4.500	7.087
30319	95	3.7402	200	7.8740	49.50	1.9488	45	1.7717	38	1.4961	0.10	4.449	4.685	7.480
30320	100	3.9370	215	8.4646	51.50	2.0276	47	1.8504	39	1.5354	0.10	4.646	5.039	7.913
30321	105	4.1339	225	8.8583	53.50	2.1063	49	1.9291	41	1.6142	0.10	4.843	5.272	8.307
30322	110	4.3307	240	9.4488	54.50	2.1457	50	1.9685	42	1.6535	0.10	5.039	5.638	8.898
30324	120	4.7244	260	10.2362	59.50	2.3425	55	2.1654	46	1.8110	0.10	5.433	6.067	9.685
30326	130	5.1181	280	11.0236	63.75	2.5098	58	2.2835	49	1.9291	0.12	6.181	6.614	10.315
30328	140	5.5118	300	11.8110	67.75	2.6673	62	2.4409	53	2.0866	0.12	6.575	7.087	11.102
30330	150	5.9055	320	12.5984	72.00	2.8346	65	2.5591	55	2.1654	0.12	6.969	7.598	11.890
30332	160	6.2992	340	13.3858	75.00	2.9528	68	2.6772	58	2.2835	0.12	7.362	8.071	12.677
30334	170	6.6929	360	14.1732	80.00	3.1496	72	2.8346	62	2.4409	0.12	7.756	8.701	13.465
30336	180	7.0866	380	14.9606	83.00	3.2677	75	2.9528	64	2.5197	0.12	8.150	9.173	14.252
30338	190	7.4803	400	15.7480	86.00	3.3858	78	3.0709	65	2.5591	0.16	8.780	9.764	14.882
30340	200	7.8740	420	16.5354	89.00	3.5039	80	3.1496	67	2.6378	0.16	9.173	9.961	15.669
30344	220	8.6614	460	18.1102	97.00	3.8189	88	3.4646	73	2.8740	0.16	9.961	11.142	17.244
30348	240	9.4488	500	19.6850	105.00	4.1339	95	3.7402	80	3.1496	0.16	10.748	12.126	18.819
30352	260	10.2362	540	21.2598	113.00	4.4488	102	4.0157	85	3.3465	0.16	11.299	13.228	20.394

\*Maximum fillet which corner radius of bearing will clear.


Bearing Number	Basic Load Ratings (lbs)		Limiting Speeds (1000 RPM)		Effective Load Center (inches)	Bearing Weight (Approx.)
	C <sub>r</sub>	C <sub>0r</sub>	Grease	Oil	a	lbs
30302	5310	4740	9.50	13.00	0.37	0.22
30303	6560	6000	8.50	12.00	0.41	0.30
30304	7870	7530	7.50	10.00	0.46	0.38
303/22	8320	8210	7.16	9.71	0.49	0.46
30305	10700	10300	6.30	8.50	0.52	0.59
303/28	12400	12500	6.00	8.00	0.57	0.75
30306	13400	13500	5.30	7.50	0.59	0.89
303/32	14600	15600	5.30	7.10	0.63	0.98
30307	17100	17800	4.80	6.70	0.66	1.19
30308	20300	22700	4.30	5.60	0.77	1.67
30309	25200	28600	3.80	5.30	0.83	2.23
30310	29200	33300	3.40	4.80	0.91	2.82
30311	33700	38400	3.20	4.30	0.97	3.59
30312	39100	45200	3.00	4.00	1.02	4.48
30313	45000	52400	2.60	3.60	1.10	5.53
30314	51000	60200	2.40	3.40	1.17	6.68
30315	56900	67400	2.40	3.20	1.25	8.00
30316	62000	74200	2.20	3.00	1.34	9.42
30317	69700	84300	2.00	2.80	1.41	11.20
30318	77600	95500	1.94	2.64	1.47	13.04
30319	83200	102000	1.86	2.53	1.52	15.25
30320	95500	118000	1.72	2.34	1.63	18.54
30321	102000	127000	1.64	2.23	1.70	21.00
30322	109000	134000	1.53	2.08	1.77	24.29
30324	120000	147000	1.41	1.92	1.97	30.69
30326	123000	152000	1.30	1.80	2.12	36.60
30328	135000	166000	1.20	1.60	2.26	44.32
30330	155000	193000	1.10	1.50	2.42	53.36
30332	172000	216000	1.00	1.40	2.54	62.62
30334	190000	243000	0.95	1.30	2.76	73.87
30336	210000	277000	0.90	1.30	2.85	86.66
30338	227000	301000	0.85	1.20	3.00	101.43
30340	232000	312000	0.85	1.20	3.20	115.32
30344	321000	447000	0.75	1.00	3.36	159.64
30348	373000	526000	0.67	0.95	3.65	204.18
30352	420000	593000	0.62	0.84	4.00	251.98

C<sub>r</sub> = Dynamic Radial Load Rating

C<sub>0r</sub> = Static Radial Load Rating

# Tapered Roller Bearings: 31300 Metric Series

Bore Diameter 25 - 150 mm, 0.9843 - 5.9055 inch

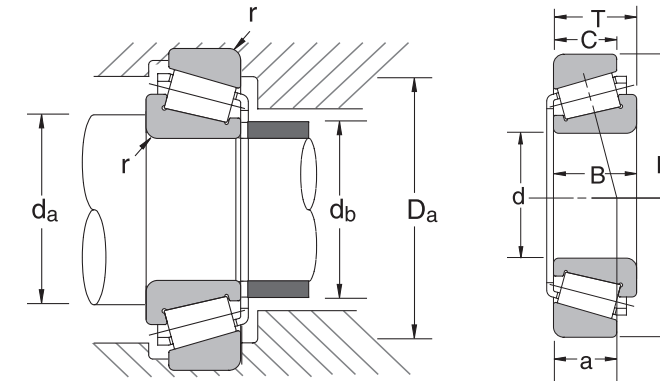

Bearing Number	Nominal Bearing Dimensions										Preferred Shoulder Diameters (in)			
	d		D		T		B		C		r*	da (min)	db (max)	Da (max)
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch				
31305J	25	0.9843	62	2.4409	18.25	0.7185	17	0.6693	13	0.5118	0.06	1.398	1.346	2.087
31306J	30	1.1811	72	2.8346	20.75	0.8169	19	0.7480	14	0.5512	0.06	1.594	1.575	2.480
31307J	35	1.3780	80	3.1496	22.75	0.8957	21	0.8268	15	0.5906	0.06	1.791	1.764	2.795
31308J	40	1.5748	90	3.5433	25.25	0.9941	23	0.9055	17	0.6693	0.06	1.988	2.000	3.189
31309J	45	1.7717	100	3.9370	27.25	1.0728	25	0.9843	18	0.7087	0.06	2.185	2.244	3.583
31310J	50	1.9685	110	4.3307	29.25	1.1516	27	1.0630	19	0.7480	0.08	2.441	2.465	3.937
31311J	55	2.1654	120	4.7244	31.50	1.2402	29	1.1417	21	0.8268	0.08	2.638	2.657	4.331
31312J	60	2.3622	130	5.1181	33.50	1.3189	31	1.2205	22	0.8661	0.08	2.953	2.929	4.646
31313J	65	2.5591	140	5.5118	36.00	1.4173	33	1.2992	23	0.9055	0.08	3.150	3.157	5.039
31314J	70	2.7559	150	5.9055	38.00	1.4961	35	1.3780	25	0.9843	0.08	3.346	3.366	5.433
31315J	75	2.9528	160	6.2992	40.00	1.5748	37	1.4567	26	1.0236	0.08	3.543	3.618	5.827
31316J	80	3.1496	170	6.6929	42.50	1.6732	39	1.5354	27	1.0630	0.08	3.740	3.823	6.220
31317J	85	3.3465	180	7.0866	44.50	1.7520	41	1.6142	28	1.1024	0.10	4.055	4.055	6.535
31318J	90	3.5433	190	7.4803	46.50	1.8307	43	1.6929	30	1.1811	0.10	4.252	4.339	6.929
31319J	95	3.7402	200	7.8740	49.50	1.9488	45	1.7717	32	1.2598	0.10	4.449	4.528	7.323
31320J	100	3.9370	215	8.4646	51.50	2.0276	47	1.8504	34	1.3386	0.10	4.646	4.713	7.913
31321J	105	4.1339	225	8.8583	53.50	2.1063	49	1.9291	35	1.3780	0.10	4.843	4.907	8.307
31322J	110	4.3307	240	9.4488	54.50	2.1457	50	1.9685	36	1.4173	0.10	5.039	4.985	8.898
31324J	120	4.7244	260	10.2362	68.00	2.6771	62	2.4409	42	1.6535	0.10	5.433	5.485	9.685
31326J	130	5.1181	280	11.0236	63.75	2.5098	58	2.2835	39	1.5354	0.12	5.945	6.015	10.315
31328J	140	5.5118	300	11.8110	67.75	2.6673	62	2.4409	43	1.6929	0.12	6.339	6.412	11.102
31330J	150	5.9055	320	12.5984	72.00	2.8346	65	2.5591	45	1.7717	0.12	6.732	6.810	11.890

\*Maximum fillet which corner radius of bearing will clear.

Bearing Number	Basic Load Ratings (lbs)		Limiting Speeds (1000 RPM)		Effective Load Center (inches)	Bearing Weight Approx.
	C <sub>r</sub>	C <sub>or</sub>	Grease	Oil	a	lbs
31305J	8540	9100	6.41	8.70	0.78	0.58
31306J	11000	11800	5.48	7.44	0.91	0.87
31307J	13900	15300	4.88	6.63	0.99	1.15
31308J	18000	20100	4.29	5.82	1.13	1.61
31309J	21500	24500	3.85	5.23	1.24	1.61
31310J	25600	29700	3.51	4.76	1.35	2.77
31311J	29400	34400	3.25	4.41	1.46	3.48
31312J	33900	39800	2.97	4.03	1.58	4.37
31313J	38900	46100	2.75	3.73	1.70	5.36
31314J	43200	51500	2.57	3.49	1.80	6.48
31315J	47400	56400	2.39	3.25	1.92	7.66
31316J	52800	63600	2.25	3.06	2.04	8.96
31317J	58700	70800	2.11	2.86	2.18	10.76
31318J	59300	70800	1.98	2.69	2.31	12.17
31319J	69700	84300	1.89	2.57	2.44	14.63
31320J	67200	114000	1.73	2.35	2.66	19.89
31321J	76400	121000	1.65	2.25	2.76	22.14
31322J	76400	136000	1.56	2.11	2.94	27.02
31324J	95500	164000	1.43	1.94	3.21	34.49
31326J	111300	184000	1.32	1.80	3.43	41.45
31328J	124800	215000	1.21	1.65	3.65	51.2
31330J	137100	247000	1.13	1.53	3.91	62.78


C<sub>r</sub> = Dynamic Radial Load Rating

C<sub>or</sub> = Static Radial Load Rating



# Tapered Roller Bearings: 32000 Metric Series

Bore Diameter 20 - 320 mm, 0.7874 - 12.5984 inch

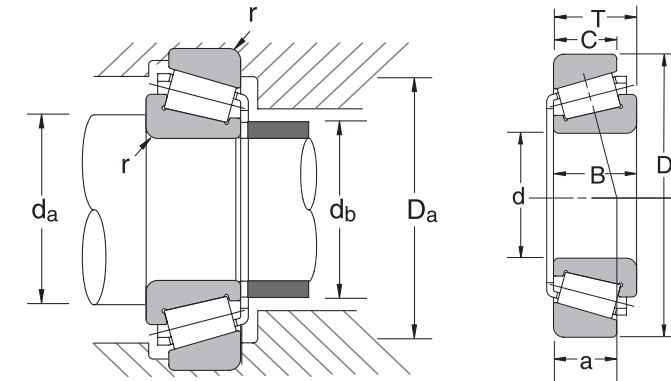

Bearing Number	Nominal Bearing Dimensions										Preferred Shoulder Diameters (in)			
	d		D		T		B		C		r*	d <sub>s</sub> (min)	d <sub>b</sub> (max)	D <sub>s</sub> (max)
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch				
32004XJ	20	0.7874	42	1.6535	15	0.5906	15	0.5906	12.0	0.4724	0.02	1.102	0.945	1.457
320/22XJ	22	0.8661	44	1.7323	15	0.5906	15	0.5906	11.5	0.4528	0.02	1.182	1.064	1.537
32005XJ	25	0.9843	47	1.8504	15	0.5906	15	0.5906	11.5	0.4528	0.02	1.299	1.181	1.654
320/28XJ	28	1.1024	52	2.0472	16	0.6299	16	0.6299	12.0	0.4724	0.04	1.457	1.299	1.811
32006XJ	30	1.1811	55	2.1654	17	0.6693	17	0.6693	13.0	0.5118	0.04	1.535	1.378	1.929
320/32XJ	32	1.2598	58	2.2835	17	0.6693	17	0.6693	13.0	0.5118	0.04	1.614	1.457	2.047
32007XJ	35	1.3780	62	2.4409	18	0.7087	18	0.7087	14.0	0.5512	0.04	1.732	1.575	2.205
32008XJ	40	1.5748	68	2.6772	19	0.7480	19	0.7480	14.5	0.5709	0.04	1.929	1.772	2.441
32009XJ	45	1.7717	75	2.9528	20	0.7874	20	0.7874	15.5	0.6102	0.04	2.126	2.008	2.717
32010XJ	50	1.9685	80	3.1496	20	0.7874	20	0.7874	15.5	0.6102	0.04	2.323	2.205	2.913
32011XJ	55	2.1654	90	3.5433	23	0.9055	23	0.9055	17.5	0.6890	0.06	2.598	2.441	3.189
32012XJ	60	2.3622	95	3.7402	23	0.9055	23	0.9055	17.5	0.6890	0.06	2.795	2.598	3.386
32013XJ	65	2.5591	100	3.9370	23	0.9055	23	0.9055	17.5	0.6890	0.06	2.992	2.795	3.583
32014XJ	70	2.7559	110	4.3307	25	0.9843	25	0.9843	19.0	0.7480	0.06	3.189	3.031	3.976
32015XJ	75	2.9528	115	4.5276	25	0.9843	25	0.9843	19.0	0.7480	0.06	3.386	3.228	4.173
32016XJ	80	3.1496	125	4.9213	29	1.1417	29	1.1417	22.0	0.8661	0.06	3.583	3.504	4.567
32017XJ	85	3.3465	130	5.1181	29	1.1417	29	1.1417	22.0	0.8661	0.06	3.780	3.701	4.764
32018XJ	90	3.5433	140	5.5118	32	1.2598	32	1.2598	24.0	0.9449	0.06	4.016	3.898	5.157
32019XJ	95	3.7402	145	5.7087	32	1.2598	32	1.2598	24.0	0.9449	0.06	4.213	4.094	5.354
32020XJ	100	3.9370	150	5.9055	32	1.2598	32	1.2598	24.0	0.9449	0.06	4.409	4.291	5.551
32021XJ	105	4.1339	160	6.2992	35	1.3780	35	1.3780	26.0	1.0236	0.08	4.724	4.528	5.906
32022XJ	110	4.3307	170	6.6929	38	1.4961	38	1.4961	29.0	1.1417	0.08	4.921	4.764	6.299
32024XJ	120	4.7244	180	7.0866	38	1.4961	38	1.4961	29.0	1.1417	0.08	5.315	5.157	6.693
32026XJ	130	5.1181	200	7.8740	45	1.7717	45	1.7717	34.0	1.3386	0.08	5.709	5.669	7.480
32028XJ	140	5.5118	210	8.2677	45	1.7717	45	1.7717	34.0	1.3386	0.08	6.102	5.984	7.874
32030XJ	150	5.9055	225	8.8583	48	1.8898	48	1.8898	36.0	1.4173	0.08	6.614	6.457	8.386
32032XJ	160	6.2992	240	9.4488	51	2.0079	51	2.0079	38.0	1.4961	0.08	7.008	6.890	8.976
32034XJ	170	6.6929	260	10.2362	57	2.2441	57	2.2441	43.0	1.6929	0.08	7.402	7.362	9.764
32036XJ	180	7.0866	280	11.0236	64	2.5197	64	2.5197	48.0	1.8898	0.08	7.795	7.835	10.551
32038XJ	190	7.4803	290	11.4173	64	2.5197	64	2.5197	48.0	1.8898	0.08	8.189	8.228	10.945
32040XJ	200	7.8740	310	12.2047	70	2.7559	70	2.7559	53.0	2.0866	0.08	8.583	8.701	11.732
32044XJ	220	8.6614	340	13.3858	76	2.9921	76	2.9921	57.0	2.2441	0.12	9.488	9.606	12.835
32048XJ	240	9.4488	360	14.1732	76	2.9921	76	2.9921	57.0	2.2441	0.12	10.276	10.315	13.622
32052XJ	260	10.2362	400	15.7480	87	3.4252	87	3.4252	65.0	2.5591	0.12	11.299	11.299	15.039
32056XJ	280	11.0236	420	16.5354	87	3.4252	87	3.4252	65.0	2.5591	0.12	12.087	12.008	15.827
32060XJ	300	11.8110	460	18.1102	100	3.9370	100	3.9370	74.0	2.9134	0.12	12.874	12.992	17.402
32064XJ	320	12.5984	480	18.8976	100	3.9370	100	3.9370	74.0	2.9134	0.12	13.661	13.780	18.189

\*Maximum fillet which corner radius of bearing will clear.

Bearing Number	Basic Load Ratings (lbs)		Limiting Speeds (1000 RPM)		Effective Load Center (inches)	Bearing Weight Approx.
	C <sub>r</sub>	C <sub>or</sub>	Grease	Oil	a	lbs
	32004XJ	5530	6160	9.00	12.00	0.42
320/22XJ	5755	6610	8.50	11.00	0.44	0.23
32005XJ	6160	7420	8.00	11.00	0.46	0.26
320/28XJ	7194	8770	7.10	9.50	0.50	0.32
32006XJ	8093	10000	6.70	9.00	0.53	0.38
320/32XJ	8430	10600	6.30	8.50	0.56	0.42
32007XJ	9779	12500	5.60	8.00	0.59	0.51
32008XJ	11802	16000	5.30	7.10	0.59	0.62
32009XJ	13489	18700	4.50	6.30	0.65	0.78
32010XJ	13713	19600	4.30	6.00	0.70	0.84
32011XJ	18321	26300	3.80	5.30	0.78	1.25
32012XJ	19221	28600	3.60	5.00	0.82	1.34
32013XJ	19446	29700	3.40	4.50	0.88	1.42
32014XJ	23380	35500	3.20	4.30	0.93	1.92
32015XJ	24504	38400	3.00	4.00	0.99	2.04
32016XJ	31473	49900	2.80	3.60	1.06	2.91
32017XJ	32148	51900	2.60	3.60	1.11	3.04
32018XJ	38218	61400	2.40	3.20	1.17	3.92
32019XJ	38892	63600	2.40	3.20	1.23	4.15
32020XJ	39566	66100	2.20	3.00	1.28	4.30
32021XJ	45861	76400	2.00	2.80	1.35	5.47
32022XJ	53055	87700	2.00	2.60	1.41	6.81
32024XJ	54403	91000	1.80	2.40	1.56	7.21
32026XJ	71939	120000	1.60	2.20	1.73	11.16
32028XJ	73063	125000	1.60	2.20	1.83	11.73
32030XJ	84303	146000	1.40	2.00	1.96	14.55
32032XJ	95544	169000	1.30	1.80	2.09	17.49
32034XJ	113529	200000	1.20	1.70	2.23	23.37
32036XJ	143878	254000	1.20	1.60	2.38	31.53
32038XJ	146126	263000	1.10	1.50	2.49	32.85
32040XJ	170855	308000	1.00	1.40	2.65	41.67
32044XJ	198956	362000	0.95	1.30	2.90	53.80
32048XJ	206824	389000	0.85	1.20	3.11	57.77
32052XJ	260778	486000	0.80	1.10	3.40	84.89
32056XJ	265275	504000	0.71	1.00	3.61	89.52
32060XJ	323725	607000	0.67	0.90	3.87	124.80
32064XJ	339462	654000	0.63	0.85	4.11	132.30


C<sub>r</sub> = Dynamic Radial Load Rating

C<sub>or</sub> = Static Radial Load Rating



# Tapered Roller Bearings: 32200 Metric Series

Bore Diameter 17 - 320 mm, 0.6693 - 12.5984 inch

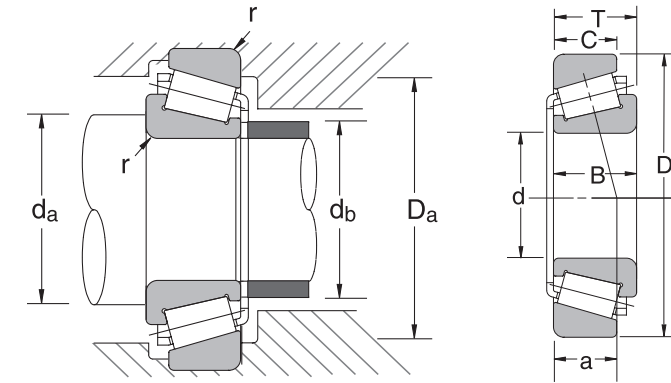

Bearing Number	Nominal Bearing Dimensions										Preferred Shoulder Diameters (in)			
	d		D		T		B		C		r*	da (min)	db (max)	Da (max)
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch				
32203J	17	0.6693	40	1.5748	17.25	0.6791	16	0.6299	14	0.5512	1.00	1.024	0.874	1.339
32204J	20	0.7874	47	1.8504	19.25	0.7579	18	0.7087	15	0.5906	1.00	1.142	0.996	1.614
322/22	22	0.8661	50	1.9685	19.25	0.7579	18	0.7087	15	0.5906	1.00	1.220	1.118	1.732
32205J	25	0.9843	52	2.0472	19.25	0.7579	18	0.7087	16	0.6299	1.00	1.339	1.213	1.811
322/28	28	1.1024	58	2.2835	20.25	0.7972	19	0.7480	16	0.6299	1.00	1.457	1.358	0.000
32206J	30	1.1811	62	2.4409	21.25	0.8366	20	0.7874	17	0.6693	1.00	1.535	1.449	2.205
322/32	32	1.2598	75	2.9528	21.75	0.8563	20	0.7874	17	0.6693	1.00	1.614	1.504	0.000
32207J	35	1.3780	72	2.8346	24.25	0.9547	23	0.9055	19	0.7480	1.50	1.791	1.685	2.480
32208J	40	1.5748	80	3.1496	24.75	0.9744	23	0.9055	19	0.7480	1.50	1.988	1.909	2.795
32209J	45	1.7717	85	3.3465	24.75	0.9744	23	0.9055	19	0.7480	1.50	2.185	2.106	2.992
32210J	50	1.9685	90	3.5433	24.75	0.9744	23	0.9055	19	0.7480	1.50	2.382	2.272	3.189
32211J	55	2.1654	100	3.9370	26.75	1.0531	25	0.9843	21	0.8268	1.50	2.579	2.496	3.583
32212J	60	2.3622	110	4.3307	29.75	1.1713	28	1.1024	24	0.9449	1.50	2.776	2.705	3.976
32213J	65	2.5591	120	4.7244	32.75	1.2894	31	1.2205	27	1.0630	1.50	2.972	2.953	4.370
32214J	70	2.7559	125	4.9213	33.25	1.3091	31	1.2205	27	1.0630	1.50	3.169	3.150	4.567
32215J	75	2.9528	130	5.1181	33.25	1.3091	31	1.2205	27	1.0630	1.50	3.366	3.307	4.764
32216J	80	3.1496	140	5.5118	35.25	1.3878	33	1.2992	28	1.1024	2.00	3.622	3.543	5.118
32217J	85	3.3465	150	5.9055	38.50	1.5157	36	1.4173	30	1.1811	2.00	3.819	3.780	5.512
32218J	90	3.5433	160	6.2992	42.50	1.6732	40	1.5748	34	1.3386	2.00	4.016	4.016	5.906
32219J	95	3.7402	170	6.6929	45.50	1.7913	43	1.6929	37	1.4567	2.00	4.331	4.252	6.220
32220J	100	3.9370	180	7.0866	49.00	1.9291	46	1.8110	39	1.5354	2.00	4.528	4.528	6.614
32221J	105	4.1339	190	7.4803	53.00	2.0866	50	1.9685	43	1.6929	2.00	4.724	4.724	7.008
32222J	110	4.3307	200	7.8740	56.00	2.2047	53	2.0866	46	1.8110	2.00	4.921	5.000	7.402
32224J	120	4.7244	215	8.4646	61.50	2.4213	58	2.2835	50	1.9685	2.00	5.315	5.394	7.992
32226J	130	5.1181	230	9.0551	67.75	2.6673	64	2.5197	54	2.1260	2.50	5.827	5.787	8.504
32228J	140	5.5118	250	9.8425	71.75	2.8248	68	2.6772	58	2.2835	2.50	6.220	6.260	9.291
32230J	150	5.9055	270	10.6299	77.00	3.0315	73	2.8740	60	2.3622	2.50	6.614	6.732	10.079
32232J	160	6.2992	290	11.4173	84.00	3.3071	80	3.1496	67	2.6378	2.50	7.008	7.252	10.866
32234J	170	6.6929	310	12.2047	91.00	3.5827	86	3.3858	71	2.7953	3.00	7.520	7.756	11.496
32236J	180	7.0866	320	12.5984	91.00	3.5827	86	3.3858	71	2.7953	3.00	7.913	8.091	11.890
32238J	190	7.4803	340	13.3858	97.00	3.8189	92	3.6220	75	2.9528	3.00	8.307	8.528	12.835
32240J	200	7.8740	360	14.1732	104.00	4.0945	98	3.8583	82	3.2283	3.00	8.701	9.075	13.465
32244J	220	8.6614	400	15.7480	114.00	4.4882	108	4.2520	90	3.5433	3.00	9.724	10.118	14.882
32248	240	9.4488	440	17.3228	127.00	5.0000	120	4.7244	100	3.9370	3.00	10.512	11.220	16.457
32252	260	10.2362	480	18.8976	137.00	5.3937	130	5.1181	106	4.1732	4.00	11.535	12.008	17.795
32256	280	11.0236	500	19.6850	137.00	5.3937	130	5.1181	106	4.1732	4.00	12.323	12.795	18.583
32260	300	11.8110	540	21.2598	149.00	5.8661	140	5.5118	115	4.5276	4.00	13.110	13.858	20.157
32264	320	12.5984	580	22.8346	159.00	6.2598	150	5.9055	125	4.9213	4.00	13.898	15.079	21.732

\*Maximum fillet which corner radius of bearing will clear.


Bearing Number	Basic Load Ratings (lbs)		Limiting Speeds (1000 RPM)		Effective Load Center (inches)	Bearing Weight Approx.
	Cr	Cor	Grease	Oil	a	lbs
32203J	6090	6290	9.72	13.20	0.44	0.23
32204J	7980	8430	8.47	11.49	0.50	0.36
322/22	8210	9100	7.75	10.51	0.53	0.40
32205J	8990	10100	7.23	9.81	0.53	0.42
322/28	10700	12100	6.48	8.80	0.58	0.54
32206J	11700	13500	6.10	8.28	0.61	0.65
322/32	12600	14600	5.87	7.97	0.62	0.74
32207J	15800	18800	5.30	7.10	0.70	1.01
32208J	17300	20300	4.80	6.30	0.74	1.21
32209J	18700	22900	4.30	6.00	0.79	1.33
32210J	19700	24500	4.00	5.30	0.83	1.42
32211J	24700	30800	3.60	5.00	0.89	1.90
32212J	29400	37500	3.40	4.50	0.95	2.60
32213J	35300	45400	3.00	4.00	1.07	3.42
32214J	35300	46100	2.80	4.00	1.13	3.65
32215J	37100	49200	2.80	3.80	1.17	3.80
32216J	43200	57100	2.60	3.40	1.20	4.70
32217J	47200	62300	2.40	3.20	1.33	5.81
32218J	57600	78700	2.20	3.00	1.42	7.52
32219J	65000	89900	2.20	2.80	1.55	9.30
32220J	73100	101000	2.00	2.60	1.63	11.14
32221J	80900	115000	1.90	2.60	1.76	13.78
32222J	89900	127000	1.80	2.40	1.86	16.20
32224J	98900	143000	1.60	2.20	2.05	19.85
32226J	119000	178000	1.50	2.00	2.24	25.02
32228J	137000	206000	1.40	1.90	2.38	31.43
32230J	158000	243000	1.29	1.75	2.55	39.36
32232J	179000	274000	1.20	1.62	2.78	49.96
32234J	209000	326000	1.11	1.50	3.01	61.75
32236J	216000	346000	1.06	1.44	3.10	65.71
32238J	250000	398000	1.00	1.35	3.17	77.56
32240J	272000	432000	0.94	1.27	3.35	94.01
32244J	326000	526000	0.83	1.13	3.80	130.97
32248	366000	614000	0.74	1.01	4.03	172.07
32252	427000	742000	0.69	0.93	4.57	226.60
32256	438000	776000	0.65	0.88	4.84	240.82
32260	499000	832000	0.58	0.79	5.18	290.61
32264	643000	1140000	0.54	0.73	5.58	384.80

Cr = Dynamic Radial Load Rating

Cor = Static Radial Load Rating

# Tapered Roller Bearings: 32300 Metric Series

Bore Diameter 17 - 240 mm, 0.6693 - 9.4488 inch

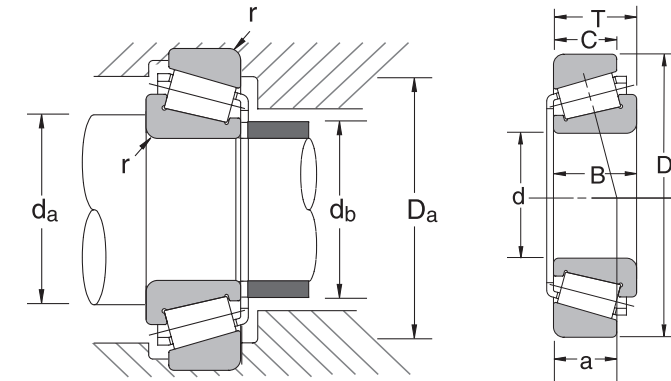

Bearing Number	Nominal Bearing Dimensions										Preferred Shoulder Diameters (in)			
	d		D		T		B		C		r*	da (min)	db (max)	Da (max)
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch				
32303	17	0.6693	47	1.8504	20.25	0.7972	19	0.7480	16	0.6299	0.04	1.024	0.941	1.614
32304	20	0.7874	52	2.0472	22.25	0.8760	21	0.8268	18	0.7087	0.06	1.201	1.024	1.693
32305	25	0.9843	62	2.4409	25.25	0.9941	24	0.9449	20	0.7874	0.06	1.496	1.260	2.087
32306	30	1.1811	72	2.8346	28.75	1.1319	27	1.0630	23	0.9055	0.06	1.693	1.496	2.480
32307	35	1.3780	80	3.1496	32.75	1.2894	31	1.2205	25	0.9843	0.06	1.929	1.693	2.795
32308	40	1.5748	90	3.5433	35.25	1.3878	33	1.2992	27	1.0630	0.06	2.126	1.969	3.189
32309	45	1.7717	100	3.9370	38.25	1.5059	36	1.4173	30	1.1811	0.06	2.323	2.205	3.583
32310	50	1.9685	110	4.3307	42.25	1.6634	40	1.5748	33	1.2992	0.08	2.677	2.441	3.937
32311	55	2.1654	120	4.7244	45.50	1.7913	43	1.6929	35	1.3780	0.08	2.874	2.638	4.331
32312	60	2.3622	130	5.1181	48.50	1.9094	46	1.8110	37	1.4567	0.10	3.189	2.913	4.646
32313	65	2.5591	140	5.5118	51.00	2.0079	48	1.8898	39	1.5354	0.10	3.386	3.150	5.039
32314	70	2.7559	150	5.9055	54.00	2.1260	51	2.0079	42	1.6535	0.10	3.583	3.386	5.433
32315	75	2.9528	160	6.2992	58.00	2.2835	55	2.1654	45	1.7717	0.10	3.780	3.583	5.827
32316	80	3.1496	170	6.6929	61.50	2.4213	58	2.2835	48	1.8898	0.10	3.976	3.858	6.220
32317	85	3.3465	180	7.0866	63.50	2.5000	60	2.3622	49	1.9291	0.12	4.331	4.094	6.535
32318	90	3.5433	190	7.4803	67.50	2.6575	64	2.5197	53	2.0866	0.12	4.528	4.291	6.929
32319	95	3.7402	200	7.8740	71.50	2.8150	67	2.6378	55	2.1654	0.12	4.685	4.528	7.480
32320	100	3.9370	215	8.4646	77.50	3.0512	73	2.8740	60	2.3622	0.12	4.925	4.925	7.913
32321	105	4.1339	225	8.8583	81.50	3.2087	77	3.0315	63	2.4803	0.12	5.118	5.039	8.465
32322	110	4.3307	240	9.4488	84.50	3.3268	80	3.1496	65	2.5591	0.12	5.319	5.477	8.898
32324	120	4.7244	260	10.2362	90.50	3.5630	86	3.3858	69	2.7165	0.12	5.713	9.692	9.685
32326	130	5.1181	280	11.0236	98.75	3.8878	93	3.6614	78	3.0709	0.12	6.378	6.496	10.315
32328	140	5.5118	300	11.8110	107.75	4.2421	102	4.0157	85	3.3465	0.12	6.772	6.969	11.102
32330	150	5.9055	320	12.5984	114.00	4.4882	108	4.2520	90	3.5433	0.12	7.165	7.520	11.890
32332	160	6.2992	340	13.3858	121.00	4.7638	114	4.4882	95	3.7402	0.12	7.559	7.953	12.677
32334	170	6.6929	360	14.1732	127.00	5.0000	120	4.7244	100	3.9370	0.12	7.953	8.386	13.465
32336	180	7.0866	380	14.9606	134.00	5.2756	126	4.9606	106	4.1732	0.12	8.346	8.858	14.252
32340	200	7.8740	420	16.5354	146.00	5.7480	138	5.4331	115	4.5276	0.16	9.409	9.961	15.669
32344	220	8.6614	460	18.1102	154.00	6.0630	145	5.7087	122	4.8031	0.16	10.197	10.787	17.244
32348	240	9.4488	500	19.6850	165.00	6.4961	155	6.1024	132	5.1969	0.16	10.984	11.850	18.819

\*Maximum fillet which corner radius of bearing will clear.


Bearing Number	Basic Load Ratings (lbs)		Limiting Speeds (1000 RPM)		Effective Load Center (inches)	Bearing Weight Approx.
	C <sub>r</sub>	C <sub>or</sub>	Grease	Oil	a	lbs
	32303	7530	7190	8.74	11.86	0.49
32304	10200	10700	8.00	11.00	0.55	0.53
32305	14100	14800	6.30	8.50	0.61	0.83
32306	18000	19900	5.60	7.50	0.71	1.26
32307	22300	25000	5.00	6.70	0.81	1.69
32308	27000	32600	4.30	6.00	0.92	2.32
32309	32400	39800	3.80	5.30	0.98	3.13
32310	39600	49500	3.60	4.80	1.10	4.15
32311	45900	58000	3.20	4.30	1.18	5.27
32312	52400	66300	3.00	4.00	1.24	6.53
32313	60000	76400	2.80	3.80	1.34	7.94
32314	67400	87700	2.60	3.40	1.42	9.59
32315	76400	100000	2.40	3.20	1.53	11.71
32316	86600	114000	2.20	3.00	1.63	14.00
32317	92200	120000	2.00	2.80	1.71	16.12
32318	101000	133000	2.00	2.60	1.83	18.96
32319	111000	95000	1.90	2.60	1.93	22.00
32320	127000	134000	1.70	2.40	2.09	28.00
32321	151000	205000	1.70	2.20	2.17	32.00
32322	152000	205000	1.50	2.00	2.30	38.50
32324	173000	238000	1.40	1.90	2.46	48.00
32326	187000	259000	1.30	1.80	2.72	58.65
32328	221000	324000	1.20	1.60	3.01	74.75
32330	252000	382000	1.10	1.50	3.21	91.29
32332	272000	398000	1.00	1.40	3.43	106.50
32334	308000	461000	1.00	1.30	3.59	125.69
32336	342000	515000	0.95	1.30	3.80	147.29
32340	409000	645000	0.80	1.10	4.20	200.43
32344	454000	719000	0.75	1.00	4.52	251.37
32348	567000	922000	0.67	0.90	4.85	319.73

C<sub>r</sub> = Dynamic Radial Load Rating

C<sub>or</sub> = Static Radial Load Rating

# Tapered Roller Bearings: 32900 Metric Series

Bore Diameter 30 - 400 mm, 1.1811 - 15.7480 inch

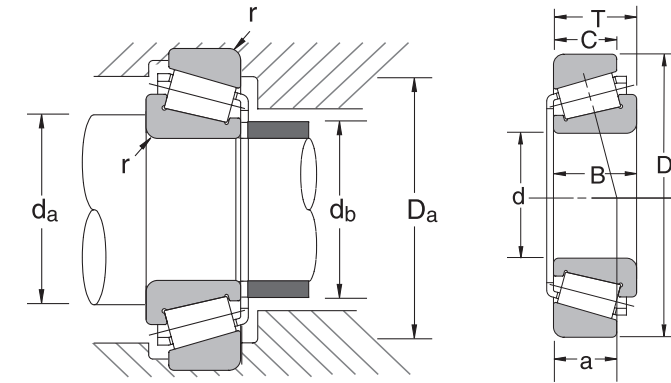

Bearing Number	Nominal Bearing Dimensions										Preferred Shoulder Diameters (in)			
	d		D		T		B		C		r*	da (min)	db (max)	Da (max)
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch				
32906j	30	1.1811	47	1.8504	12	0.4724	12.0	0.4724	9.0	0.3543	0.01	1.339	0.053	1.732
32907j	35	1.3780	55	2.1654	14	0.5512	14.0	0.5512	11.5	0.4528	0.02	1.693	0.067	1.969
32908j	40	1.5748	62	2.4409	15	0.5906	15.0	0.5906	12.0	0.4724	0.02	1.890	0.074	2.244
32909j	45	1.7717	68	2.6772	15	0.5906	15.0	0.5906	12.0	0.4724	0.02	2.087	0.082	2.480
32910j	50	1.9685	72	2.8346	15	0.5906	15.0	0.5906	12.0	0.4724	0.02	2.283	0.090	2.638
32911j	55	2.1654	80	3.1496	17	0.6693	17.0	0.6693	14.0	0.5512	0.04	2.520	0.099	2.913
32912j	60	2.3622	85	3.3465	17	0.6693	17.0	0.6693	14.0	0.5512	0.04	2.717	0.107	3.110
32913j	65	2.5591	90	3.5433	17	0.6693	17.0	0.6693	14.0	0.5512	0.04	2.913	0.115	3.307
32914j	70	2.7559	100	3.9370	20	0.7874	20.0	0.7874	16.0	0.6299	0.04	3.110	0.122	3.701
32915j	75	2.9528	105	4.1339	20	0.7874	20.0	0.7874	16.0	0.6299	0.04	3.307	0.130	3.898
32916j	80	3.1496	110	4.3307	20	0.7874	20.0	0.7874	16.0	0.6299	0.04	3.504	0.138	4.094
32917j	85	3.3465	120	4.7244	23	0.9055	23.0	0.9055	18.0	0.7087	0.06	3.780	0.149	4.370
32918j	90	3.5433	125	4.9213	23	0.9055	23.0	0.9055	18.0	0.7087	0.06	3.976	0.157	4.567
32919j	95	3.7402	130	5.1181	23	0.9055	23.0	0.9055	18.0	0.7087	0.06	4.173	0.164	4.764
32920j	100	3.9370	140	5.5118	25	0.9843	25.0	0.9843	20.0	0.7874	0.06	4.409	0.174	5.197
32921j	105	4.1339	145	5.7087	25	0.9843	25.0	0.9843	20.0	0.7874	0.06	4.606	0.181	5.394
32922j	110	4.3307	150	5.9055	25	0.9843	25.0	0.9843	20.0	0.7874	0.06	4.803	0.189	5.591
32924j	120	4.7244	165	6.4961	29	1.1417	29.0	1.1417	23.0	0.9055	0.06	5.236	0.206	6.142
32926j	130	5.1181	180	7.0866	32	1.2598	32.0	1.2598	25.0	0.9843	0.06	5.709	0.225	6.850
32928j	140	5.5118	190	7.4803	32	1.2598	32.0	1.2598	25.0	0.9843	0.06	6.102	0.240	7.087
32930j	150	5.9055	210	8.2677	38	1.4961	38.0	1.4961	30.0	1.1811	0.08	6.614	0.260	7.874
32932j	160	6.2992	220	8.6614	38	1.4961	38.0	1.4961	30.0	1.1811	0.08	7.008	0.276	8.189
32934j	170	6.6929	230	9.0551	38	1.4961	38.0	1.4961	30.0	1.1811	0.08	7.362	0.290	8.701
32936j	180	7.0866	250	9.8425	45	1.7717	45.0	1.7717	34.0	1.3386	0.08	7.913	0.312	9.370
32938j	190	7.4803	260	10.2362	45	1.7717	45.0	1.7717	34.0	1.3386	0.08	8.268	0.326	9.764
32940j	200	7.8740	280	11.0236	51	2.0079	51.0	2.0079	39.0	1.5354	0.10	8.819	0.347	10.669
32944j	220	8.6614	300	11.8110	51	2.0079	51.0	2.0079	39.0	1.5354	0.10	9.567	0.377	11.339
32948j	240	9.4488	320	12.5984	51	2.0079	51.0	2.0079	39.0	1.5354	0.10	10.394	0.409	12.126
32952j	260	10.2362	360	14.1732	64	2.5000	63.5	2.5000	48.0	1.8898	0.10	11.299	0.445	13.701
32956j	280	11.0236	380	14.9606	64	2.5000	63.5	2.5000	48.0	1.8898	0.10	12.126	0.477	14.055
32960j	300	11.8110	420	16.5354	76	2.9921	76.0	2.9921	57.0	2.2441	0.12	13.189	0.519	15.512
32964j	320	12.5984	440	17.3228	76	2.9921	76.0	2.9921	57.0	2.2441	0.12	13.940	0.580	16.220
32968j	340	13.3858	460	18.1102	76	2.9921	76.0	2.9921	57.0	2.2441	0.10	14.724	0.580	17.047
32972j	360	14.1732	480	18.8976	76	2.9921	76.0	2.9921	57.0	2.2441	0.10	15.512	0.611	17.795
32976j	380	14.9606	520	20.4724	87	3.4252	82.0	3.2283	71.0	2.7953	0.12	16.024	0.624	19.764
32980j	400	15.7480	540	21.2598	87	3.4252	82.0	3.2283	71.0	2.7953	0.12	16.811	0.624	20.551

\*Maximum fillet which corner radius of bearing will clear.


Bearing Number	Basic Load Ratings (lbs)		Limiting Speeds (1000 RPM)		Effective Load Center (inches)	Bearing Weight Approx.
	Cr	Cor	Grease	Oil	a	lbs
32906j	3960	5490	7.50	10.00	0.36	0.16
32907j	6160	8770	6.30	8.50	0.42	0.27
32908j	7640	10600	5.60	7.50	0.45	0.36
32909j	7760	11400	5.00	67.00	0.48	0.41
32910j	8090	12100	4.50	6.30	0.53	0.43
32911j	10200	16700	4.30	5.60	0.57	0.62
32912j	11000	19000	3.80	5.30	0.61	0.67
32913j	11000	19400	3.60	5.00	0.66	0.71
32914j	15700	25400	3.20	4.50	0.69	1.09
32915j	16300	27000	3.20	4.30	0.74	1.17
32916j	16900	28800	3.00	4.50	0.78	1.23
32917j	21000	35300	3.20	4.30	0.82	1.76
32918j	21800	37500	3.00	4.00	0.87	1.85
32919j	22000	38700	2.80	3.80	0.91	1.93
32920j	26300	46100	2.60	3.60	0.95	2.60
32921j	26800	47700	2.40	3.40	1.00	2.71
32922j	27700	50400	2.20	3.20	1.04	2.84
32924j	36200	63600	2.20	3.00	1.15	3.97
32926j	45000	82100	2.20	2.80	1.24	5.42
32928j	46300	87700	1.90	2.60	1.32	5.82
32930j	63200	117000	1.50	2.00	1.44	8.93
32932j	66500	128000	1.40	1.90	1.52	9.53
32934j	66100	126000	1.40	1.80	1.64	9.79
32936j	78700	154000	1.30	1.70	2.12	14.46
32938j	82100	161000	1.20	1.60	2.18	15.06
32940j	108000	210000	1.10	1.50	2.13	21.28
32944j	110000	223000	1.00	1.40	2.33	22.71
32948j	112000	234000	0.90	1.30	2.56	24.48
32952j	164000	326000	0.80	1.10	2.75	41.01
32956j	172000	355000	0.80	1.10	2.96	44.10
32960j	227000	472000	0.70	1.00	3.15	69.24
32964j	202000	423000	0.70	0.90	3.32	70.56
32968j	234000	499000	0.60	0.80	3.58	75.63
32972j	243000	526000	0.60	0.80	3.81	79.60
32976j	270000	569000	0.55	0.74	3.75	109.15
32980j	279000	602000	0.52	0.70	3.97	116.20

Cr = Dynamic Radial Load Rating

Cor = Static Radial Load Rating

# Tapered Roller Bearings: 33000 Metric Series

Bore Diameter 25 - 120 mm, 0.9843 - 4.7244 inch

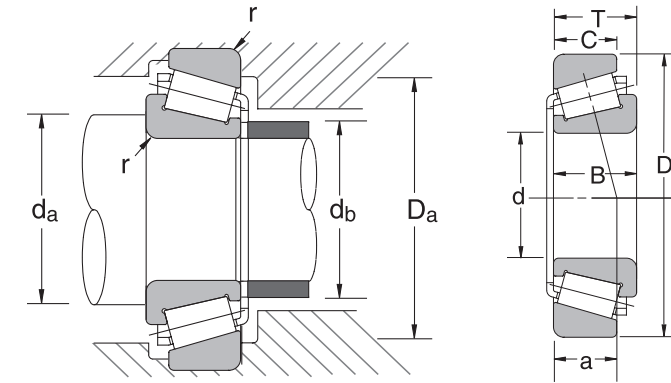

Bearing Number	Nominal Bearing Dimensions										Preferred Shoulder Diameters (in)			
	d		D		T		B		C		r*	da (min)	db (max)	Da (max)
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch				
33005J	25	0.9843	47	1.8504	17	0.6693	17	0.6693	14.0	0.5512	0.02	1.299	1.142	1.654
33006J	30	1.1811	55	2.1654	20	0.7874	20	0.7874	16.0	0.6299	0.04	1.535	1.378	1.929
33007J	35	1.3780	62	2.4409	21	0.8268	21	0.8268	17.0	0.6693	0.04	1.732	1.575	2.205
33008J	40	1.5748	68	2.6772	22	0.8661	22	0.8661	18.0	0.7087	0.04	1.929	1.772	2.441
33009J	45	1.7717	75	2.9528	24	0.9449	24	0.9449	19.0	0.7480	0.04	2.126	2.008	2.717
33010J	50	1.9685	80	3.1496	24	0.9449	24	0.9449	19.0	0.7480	0.04	2.323	2.165	2.913
33011J	55	2.1654	90	3.5433	27	1.0630	27	1.0630	21.0	0.8268	0.06	2.598	2.441	3.189
33012J	60	2.3622	95	3.7402	27	1.0630	27	1.0630	21.0	0.8268	0.06	2.795	2.598	3.386
33013J	65	2.5591	100	3.9370	27	1.0630	27	1.0630	21.0	0.8268	0.06	2.992	2.795	3.583
33014J	70	2.7559	110	4.3307	31	1.2205	31	1.2205	25.5	1.0039	0.06	3.189	3.071	3.976
33015J	75	2.9528	115	4.5276	31	1.2205	31	1.2205	25.5	1.0039	0.06	3.386	3.268	4.173
33016J	80	3.1496	125	4.9213	36	1.4173	36	1.4173	29.5	1.1614	0.06	3.583	3.465	4.567
33017J	85	3.3465	130	5.1181	36	1.4173	36	1.4173	29.5	1.1614	0.06	3.780	3.701	4.764
33018J	90	3.5433	140	5.5118	39	1.5354	39	1.5354	32.5	1.2795	0.06	4.016	3.898	5.157
33019J	95	3.7402	145	5.7087	39	1.5354	39	1.5354	32.5	1.2795	0.06	4.213	4.094	5.354
33020J	100	3.9370	150	5.9055	39	1.5354	39	1.5354	32.5	1.2795	0.06	4.409	4.213	5.551
33021J	105	4.1339	160	6.2992	43	1.6929	43	1.6929	34.0	1.3386	0.08	4.724	4.528	5.906
33022J	110	4.3307	170	6.6929	47	1.8504	47	1.8504	37.0	1.4567	0.08	4.921	4.764	6.299
33024J	120	4.7244	180	7.0866	48	1.8898	48	1.8898	38.0	1.4961	0.08	5.236	5.197	6.693

\*Maximum fillet which corner radius of bearing will clear.


Bearing Number	Basic Load Ratings (lbs)		Limiting Speeds (1000 RPM)		Effective Load Center (inches)	Bearing Weight Approx.
	C <sub>r</sub>	C <sub>0r</sub>	Grease	Oil	a	lbs
33005J	6970	8540	8.00	11.00	0.46	0.26
33006J	9440	12100	6.70	9.00	0.52	0.46
33007J	11000	14600	5.60	8.00	0.56	0.59
33008J	13300	18300	5.30	7.10	0.57	0.71
33009J	15100	21200	4.80	6.30	0.64	0.91
33010J	15800	23400	4.30	6.00	0.69	1.00
33011J	20600	31000	3.80	5.30	0.76	1.45
33012J	21600	33700	3.60	5.00	0.79	1.57
33013J	21900	35100	3.40	4.50	0.83	1.68
33014J	28600	45900	3.00	4.30	0.87	2.45
33015J	29900	49500	3.00	4.00	0.91	2.60
33016J	38700	63400	2.80	3.60	1.00	3.66
33017J	40500	68600	2.60	3.60	1.04	3.86
33018J	49500	80900	2.40	3.20	1.10	4.87
33019J	51900	87700	2.40	3.20	1.13	5.07
33020J	52800	91000	2.20	3.00	1.15	5.25
33021J	57600	97800	2.00	2.80	1.22	6.68
33022J	66100	116000	2.00	2.60	1.33	8.47
33024J	67400	121000	1.80	2.40	1.44	9.50

C<sub>r</sub> = Dynamic Radial Load Rating

C<sub>0r</sub> = Static Radial Load Rating

# Tapered Roller Bearings: 33100 Metric Series

Bore Diameter 45 - 110 mm, 1.7717 - 4.3307 inch

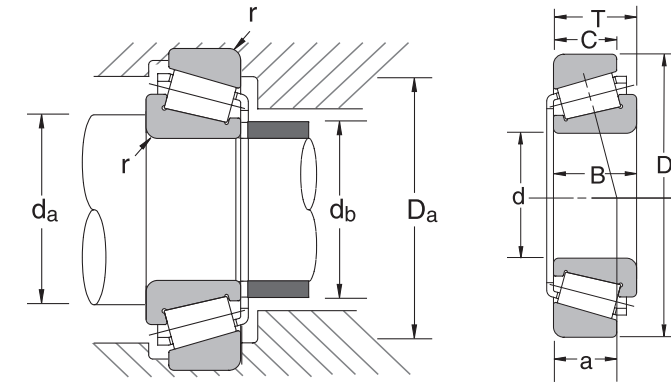

Bearing Number	Nominal Bearing Dimensions										Preferred Shoulder Diameters (in)			
	d		D		T		B		C		r*	da (min)	db (max)	Da (max)
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch				
33109J	45	1.7717	80	3.1496	26	1.0236	26	1.0236	20.5	0.8071	0.06	2.205	2.008	2.795
33110J	50	1.9685	85	3.3465	26	1.0236	26	1.0236	20.0	0.7874	0.06	2.402	2.205	2.992
33111J	55	2.1654	95	3.7402	30	1.1811	30	1.1811	23.0	0.9055	0.06	2.598	2.441	3.386
33112J	60	2.3622	100	3.9370	30	1.1811	30	1.1811	23.0	0.9055	0.06	2.795	2.677	3.583
33113J	65	2.5591	110	4.3307	34	1.3386	34	1.3386	26.5	1.0433	0.06	2.992	2.874	3.976
33114J	70	2.7559	120	4.7244	37	1.4567	37	1.4567	29.0	1.1417	0.06	3.228	3.110	4.370
33115J	75	2.9528	125	4.9213	37	1.4567	37	1.4567	29.0	1.1417	0.06	3.425	3.268	4.567
33116J	80	3.1496	130	5.1181	37	1.4567	37	1.4567	29.0	1.1417	0.06	3.622	3.465	4.764
33117J	85	3.3465	140	5.5118	41	1.6142	41	1.6142	32.0	1.2598	0.08	3.937	3.701	5.118
33118J	90	3.5433	150	5.9055	45	1.7717	45	1.7717	35.0	1.3780	0.08	4.134	3.937	5.512
33120J	100	3.9370	165	6.4961	52	2.0472	52	2.0472	40.0	1.5748	0.08	4.528	4.370	6.102
33122J	110	4.3307	180	7.0866	56	2.2047	56	2.2047	43.0	1.6929	0.08	4.961	4.764	6.693

\*Maximum fillet which corner radius of bearing will clear.


Bearing Number	Basic Load Ratings (lbs)		Limiting Speeds (1000 RPM)		Effective Load Center (inches)	Bearing Weight Approx.
	C <sub>r</sub>	C <sub>or</sub>	Grease	Oil	a	lbs
	33109J	18900	25400	4.50	6.00	0.75
33110J	20000	28300	4.30	5.60	0.80	1.32
33111J	25200	35500	3.80	5.00	0.88	1.93
33112J	25900	37300	3.40	4.80	0.93	2.01
33113J	33300	49000	3.20	4.30	1.02	2.91
33114J	39800	58900	3.00	4.00	1.10	3.77
33115J	40900	61800	2.80	3.80	1.15	3.97
33116J	41800	65000	2.60	3.60	1.20	4.15
33117J	51700	82100	2.40	3.40	1.29	5.53
33118J	58200	91000	2.40	3.20	1.39	6.92
33120J	70800	116000	2.10	2.80	1.59	9.70
33122J	82100	137000	1.90	2.60	1.74	12.2

C<sub>r</sub> = Dynamic Radial Load Rating

C<sub>or</sub> = Static Radial Load Rating

# Tapered Roller Bearings: 33200 Metric Series

Bore Diameter 25 - 100 mm, 0.9843 – 3.9370 inch

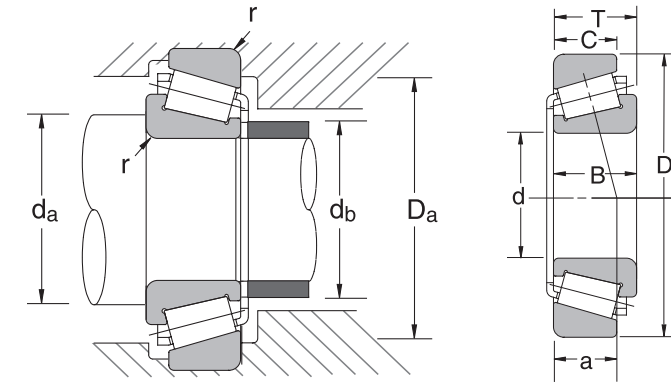

Bearing Number	Nominal Bearing Dimensions										Preferred Shoulder Diameters (in)			
	d		D		T		B		C		r*	d <sub>a</sub> (min)	d <sub>b</sub> (max)	D <sub>a</sub> (max)
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch				
33205J	25	0.9843	52	2.0472	22	0.8661	22	0.8661	18.0	0.7087	0.71	1.339	1.142	1.811
33206J	30	1.1811	62	2.4409	25	0.9843	25	0.9843	19.5	0.7677	0.77	1.535	1.378	2.205
33207J	35	1.3780	72	2.8346	28	1.1024	28	1.1024	22.0	0.8661	0.87	1.811	1.614	2.480
33208J	40	1.5748	80	3.1496	32	1.2598	32	1.2598	25.0	0.9843	0.98	2.008	1.811	2.795
33209J	45	1.7717	85	3.3465	32	1.2598	32	1.2598	25.0	0.9843	0.98	2.205	2.008	2.992
33210J	50	1.9685	90	3.5433	32	1.2598	32	1.2598	24.5	0.9646	0.96	2.402	2.205	3.189
33211J	55	2.1654	100	3.9370	35	1.3780	35	1.3780	27.0	1.0630	1.06	2.638	2.441	3.583
33212J	60	2.3622	110	4.3307	38	1.4961	38	1.4961	29.0	1.1417	1.14	2.835	2.677	3.976
33213J	65	2.5591	120	4.7244	41	1.6142	41	1.6142	32.0	1.2598	1.26	3.031	2.913	4.370
33214J	70	2.7559	125	4.9213	41	1.6142	41	1.6142	32.0	1.2598	1.26	3.228	3.071	4.567
33215J	75	2.9528	130	5.1181	41	1.6142	41	1.6142	31.0	1.2205	1.22	3.425	3.268	4.764
33216J	80	3.1496	140	5.5118	46	1.8110	46	1.8110	35.0	1.3780	1.38	3.740	3.504	5.118
33217J	85	3.3465	150	5.9055	49	1.9291	49	1.9291	37.0	1.4567	1.46	3.937	3.740	5.512
33220J	100	3.9370	180	7.0866	63	2.4803	63	2.4803	48.0	1.8898	1.89	4.646	4.524	6.378

\*Maximum fillet which corner radius of bearing will clear.

Bearing Number	Basic Load Ratings (lbs)		Limiting Speeds (1000 RPM)		Effective Load Center (inches)	Bearing Weight Approx.
	C <sub>r</sub>	C <sub>or</sub>	Grease	Oil	a	lbs
33205J	10680	12700	7.50	10.0	0.56	0.49
33206J	14950	17900	6.00	8.0	0.63	0.78
33207J	19450	24300	5.30	7.1	0.72	1.19
33208J	24050	30800	4.80	6.3	0.82	1.64
33209J	24950	33000	4.30	6.0	0.87	1.80
33210J	26530	37100	4.00	5.3	0.91	1.91
33211J	31700	43400	3.60	5.0	0.99	2.60
33212J	37320	51900	3.40	4.5	1.09	3.44
33213J	45410	63400	3.00	4.0	1.15	4.50
33214J	46990	67200	2.80	4.0	1.20	4.74
33215J	48330	70800	2.80	3.8	1.24	4.96
33216J	57550	86600	2.60	3.4	1.37	6.46
33217J	63170	93300	2.40	3.2	1.47	7.87
33220J	92170	143000	1.97	2.7	1.81	14.91


C<sub>r</sub> = Dynamic Radial Load Rating

C<sub>or</sub> = Static Radial Load Rating



# Tapered Roller Bearings: Metric Series – Medium Angle 30200C Series

Bore Diameter 20 - 85 mm, 0.7874 – 3.3465 inch

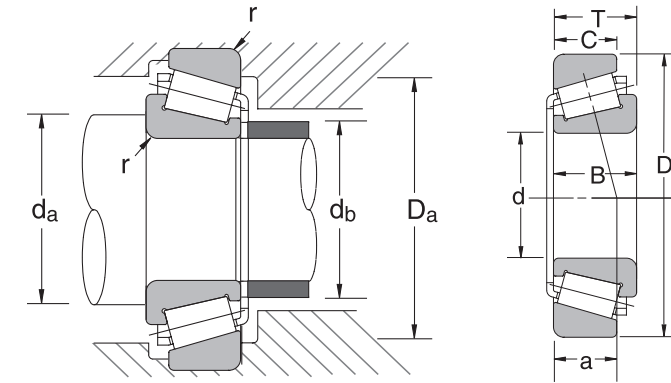

Bearing Number	Nominal Bearing Dimensions										Preferred Shoulder Diameters (in)			
	d		D		T		B		C		r*	d <sub>a</sub> (min)	d <sub>b</sub> (max)	D <sub>a</sub> (max)
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch				
30204C	20	0.7874	47	1.8504	15.25	0.6004	14	0.5512	12	0.4724	0.039	1.143	1.024	1.615
302/22C	22	0.8661	50	1.9685	15.25	0.6004	14	0.5512	12	0.4724	0.039	1.221	1.143	1.734
30205C	25	0.9843	52	2.0472	16.25	0.6398	15	0.5906	12	0.4724	0.039	1.340	1.261	1.812
302/28C	28	1.1024	58	2.2835	17.25	0.6791	16	0.6299	12	0.4724	0.039	1.458	1.340	2.049
30206C	30	1.1811	62	2.4409	17.25	0.6791	16	0.6299	12	0.4724	0.059	1.537	1.418	2.206
302/32C	32	1.2598	65	2.5591	18.25	0.7185	17	0.6693	13	0.5118	0.039	1.615	1.537	2.325
30207C	35	1.3780	72	2.8346	18.25	0.7185	17	0.6693	13	0.5118	0.059	1.812	1.734	2.482
30208C	40	1.5748	80	3.1496	19.75	0.7776	18	0.7087	14	0.5512	0.059	2.009	1.931	2.797
30209C	45	1.7717	85	3.3465	20.75	0.8169	19	0.7480	15	0.5906	0.059	2.206	2.087	2.992
30210C	50	1.9685	90	3.5433	21.75	0.8563	20	0.7874	16	0.6299	0.059	2.403	2.283	3.189
30216C	80	3.1496	140	5.5118	28.25	1.1122	26	1.0236	20	0.7874	0.118	3.743	3.622	5.118
30217C	85	3.3465	150	5.9055	30.50	1.2008	28	1.1024	22	0.8661	0.118	3.940	3.858	5.512

\*Maximum fillet which corner radius of bearing will clear.


Bearing Number	Basic Load Ratings (lbs)		Limiting Speeds (1000 RPM)		Effective Load Center (inches)	Bearing Weight Approx.
	C <sub>r</sub>	C <sub>or</sub>	Grease	Oil	a	lbs
30204C	5370	5400	8.0	11.00	0.51	0.269
302/22C	6110	6630	7.5	10.00	0.51	0.305
30205C	6320	7080	6.7	9.50	0.57	0.330
302/28C	7640	8660	6.3	8.50	0.67	0.445
30206C	7980	8320	5.6	7.50	0.70	0.525
302/32C	10200	11800	5.6	7.50	0.67	0.590
30207C	10600	12300	5.0	6.70	0.77	0.715
30208C	24100	29000	4.5	6.00	0.85	0.935
30209C	14200	17600	4.3	5.60	0.84	1.050
30210C	15700	20900	3.8	5.30	0.95	1.190
30216C	33000	42700	2.6	3.40	1.33	3.600
30217C	38400	50800	2.4	3.20	1.43	4.500

C<sub>r</sub> = Dynamic Radial Load Rating

C<sub>or</sub> = Static Radial Load Rating

# Tapered Roller Bearings: Metric Series – Medium Angle 30300C Series

Bore Diameter 20 - 95 mm, 0.7874 – 3.7402 inch

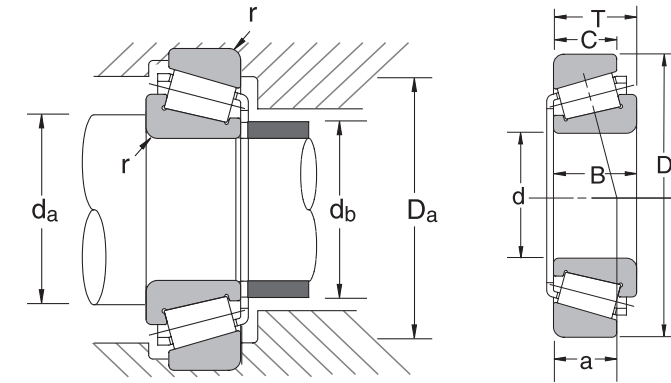

Bearing Number	Nominal Bearing Dimensions										Preferred Shoulder Diameters (in)			
	d		D		T		B		C		r*	da (min)	db (max)	Da (max)
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch				
30304C	20	0.7874	52	2.0472	16.25	0.6398	16	0.6299	12	0.4724	0.079	1.221	1.064	1.694
303/22C	22	0.8661	56	2.2047	17.25	0.6791	16	0.6299	13	0.5118	0.039	1.300	1.182	1.852
30305C	25	0.9843	62	2.4409	18.25	0.7185	17	0.6693	14	0.5512	0.059	1.418	1.379	2.088
303/28C	28	1.1024	68	2.6772	19.75	0.7776	18	0.7087	14	0.5512	0.059	1.537	1.497	2.325
30306C	30	1.1811	72	2.8346	20.75	0.8169	19	0.7480	14	0.5512	0.079	1.615	1.497	2.482
303/32C	32	1.2598	75	2.9528	21.75	0.8563	20	0.7874	16	0.6299	0.039	1.694	1.694	2.600
30307C	35	1.3780	80	3.1496	22.75	0.8957	21	0.8268	16	0.6299	0.059	1.852	1.734	2.797
30308C	40	1.5748	90	3.5433	25.25	0.9941	23	0.9055	18	0.7087	0.059	2.049	1.970	3.191
30309C	45	1.7717	100	3.9370	27.25	1.0728	25	0.9843	19	0.7480	0.059	2.246	2.246	3.583
30310C	50	1.9685	110	4.3307	29.25	1.1516	27	1.0630	20	0.7874	0.079	2.561	2.559	3.937
30314C	70	2.7559	150	5.9055	38.00	1.4961	35	1.3780	27	1.0630	0.138	3.467	3.425	5.433
30319C	95	3.7402	200	7.8740	49.50	1.9488	45	1.7717	36	1.4173	0.157	4.570	4.685	7.323

\*Maximum fillet which corner radius of bearing will clear.


Bearing Number	Basic Load Ratings (lbs)		Limiting Speeds (1000 RPM)		Effective Load Center (inches)	Bearing Weight Approx.
	C <sub>r</sub>	C <sub>0r</sub>	Grease	Oil	a	lbs
30304C	6970	6500	8.0	11.0	0.530	0.370
303/22C	7760	7640	6.7	9.5	0.630	0.440
30305C	9440	10100	6.0	8.5	0.650	0.585
303/28C	11100	11400	5.6	7.5	0.690	0.740
30306C	12700	12500	5.3	7.1	0.730	0.860
303/32C	13400	15400	5.0	6.7	0.740	0.980
30307C	15300	15800	4.8	6.3	0.800	1.120
30308C	19000	21000	4.3	5.6	0.890	1.580
30309C	23200	26300	3.6	5.0	1.000	2.170
30310C	26800	31000	3.4	4.5	1.100	2.760
30314C	45200	53100	2.4	3.4	1.440	6.200
30319C	78700	96700	1.9	2.6	1.920	15.000

C<sub>r</sub> = Dynamic Radial Load Rating

C<sub>0r</sub> = Static Radial Load Rating

# Tapered Roller Bearings: Metric Series – Medium Angle 32200C Series

Bore Diameter 20 - 60 mm, 0.7874 - 2.3622 inch

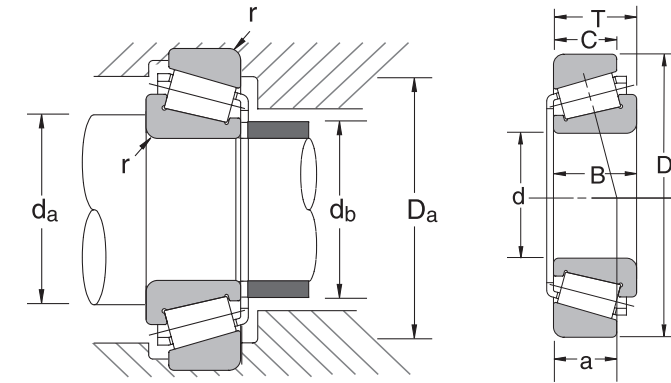

Bearing Number	Nominal Bearing Dimensions										Preferred Shoulder Diameters (in)			
	d		D		T		B		C		r*	da (min)	db (max)	Da (max)
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch				
32204C	20	0.7874	47	1.8504	19.25	0.7579	18	0.7087	15	0.5906	0.059	1.143	0.984	1.615
322/22C	22	0.8661	50	1.9685	19.25	0.7579	18	0.7087	15	0.5906	0.039	1.221	1.143	1.734
32205C	25	0.9843	52	2.0472	19.25	0.7579	18	0.7087	15	0.5906	0.039	1.340	1.182	1.812
322/28C	28	1.1024	58	2.2835	20.25	0.7972	19	0.7480	15	0.5906	0.059	1.458	1.300	2.049
32206C	30	1.1811	62	2.4409	21.25	0.8366	20	0.7874	16	0.6299	0.059	1.537	1.379	2.206
322/32C	32	1.2598	65	2.5591	22.25	0.8760	21	0.8268	17	0.6693	0.039	1.615	1.537	2.325
32207C	35	1.3780	72	2.8346	24.25	0.9547	23	0.9055	18	0.7087	0.059	1.812	1.655	3.664
32208C	40	1.5748	80	3.1496	24.75	0.9744	23	0.9055	18	0.7087	0.059	2.009	1.850	2.797
32209C	45	1.7717	85	3.3465	24.75	0.9744	23	0.9055	18	0.7087	0.059	2.206	2.047	2.992
32210C	50	1.9685	90	3.5433	24.75	0.9744	23	0.9055	18	0.7087	0.079	2.403	2.283	3.189
32212C	60	2.3622	110	4.3307	29.75	1.1713	28	1.1024	22	0.8661	0.098	2.837	2.677	3.976

\*Maximum fillet which corner radius of bearing will clear.


Bearing Number	Basic Load Ratings (lbs)		Limiting Speeds (1000 RPM)		Effective Load Center (inches)	Bearing Weight Approx.
	C <sub>r</sub>	C <sub>or</sub>	Grease	Oil	a	lbs
32204C	7080	7530	8.5	11.0	0.57	0.355
322/22C	7530	8880	7.5	10.0	0.60	0.390
32205C	7870	9440	7.1	9.5	0.62	0.415
322/28C	9440	11200	6.3	8.5	0.64	0.530
32206C	10800	12600	6.0	8.0	0.70	0.630
322/32C	11100	13500	5.6	7.5	0.80	0.730
32207C	13600	16100	5.0	7.1	0.81	0.950
32208C	16600	20300	4.8	6.3	0.85	1.200
32209C	17000	21500	4.3	6.0	0.96	1.300
32210C	17600	23200	4.0	5.4	0.98	1.380
32212C	23600	29200	3.4	4.5	1.08	2.450

C<sub>r</sub> = Dynamic Radial Load Rating

C<sub>or</sub> = Static Radial Load Rating

# Tapered Roller Bearings: Metric Series – Medium Angle 32300C Series

Bore Diameter 20 - 75 mm, 0.7874 - 2.9528 inch

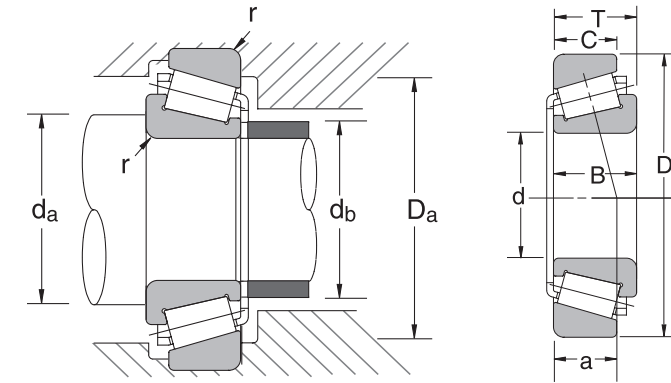

Bearing Number	Nominal Bearing Dimensions										Preferred Shoulder Diameters (in)			
	d		D		T		B		C		r*	d <sub>a</sub> (min)	d <sub>b</sub> (max)	D <sub>a</sub> (max)
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch				
32304C	20	0.7874	52	2.0472	22.25	0.8760	21	0.8268	17	0.6693	0.059	1.300	1.024	1.694
323/28C	28	1.1024	68	2.6772	25.75	1.0138	24	0.9449	19	0.7480	0.059	1.615	1.379	2.325
32305C	25	0.9843	62	2.4409	25.25	0.9941	24	0.9449	19	0.7480	0.059	1.497	1.300	2.088
323/32C	32	1.2598	75	2.9528	29.75	1.1713	28	1.1024	22	0.8661	0.059	1.773	1.615	2.600
32306C	30	1.1811	72	2.8346	28.75	1.1319	27	1.0630	22	0.8661	0.079	1.694	1.418	2.482
32307C	35	1.3780	80	3.1496	32.75	1.2894	31	1.2205	24	0.9449	0.059	1.931	1.734	2.797
32308C	40	1.5748	90	3.5433	35.25	1.3878	33	1.2992	25	0.9843	0.059	2.128	1.891	3.191
32309C	45	1.7717	100	3.9370	38.25	1.5059	36	1.4173	28	1.1024	0.059	2.325	2.206	3.583
32310C	50	1.9685	110	4.3307	42.25	1.6634	40	1.5748	31	1.2205	0.079	2.677	2.323	3.937
32312C	60	2.3622	130	5.1181	48.50	1.9094	46	1.8110	35	1.3780	0.138	3.191	2.913	4.646
32314C	70	2.7559	150	5.9055	54.00	2.1260	51	2.0079	39	1.5354	0.138	3.585	3.346	5.433
32315C	75	2.9528	160	6.2992	58.00	2.2835	55	2.1654	43	1.6929	0.138	3.782	3.543	5.827

\*Maximum fillet which corner radius of bearing will clear.

Bearing Number	Basic Load Ratings (lbs)		Limiting Speeds (1000 RPM)		Effective Load Center (inches)	Bearing Weight Approx.
	C <sub>r</sub>	C <sub>0r</sub>	Grease	Oil	a	lbs
32304C	9440	10000	7.5	10.0	0.65	0.515
323/28C	14400	15600	5.6	7.5	0.83	0.980
32305C	12500	14400	6.3	8.5	0.77	0.805
323/32C	19000	21400	5.0	7.1	0.87	1.370
32306C	17100	19400	5.6	7.5	0.83	1.220
32307C	20000	24700	4.8	6.3	0.93	1.700
32308C	24100	29000	4.3	5.6	1.06	2.270
32309C	29900	37800	3.8	5.0	1.21	3.050
32310C	36900	49000	3.6	4.8	1.32	4.050
32312C	44100	56000	3.0	4.0	1.57	6.150
32314C	58900	76400	2.4	3.4	1.74	8.950
32315C	69700	94400	2.4	3.2	1.88	11.600

C<sub>r</sub> = Dynamic Radial Load Rating

C<sub>0r</sub> = Static Radial Load Rating

# Inch Tapered Roller Bearings



## Prefix

- EH:** Extra Heavy
- EL:** Extra Light
- H:** Heavy
- HH:** Heavier than Heavy
- HM:** Heavy Medium
- L:** Light
- LL:** Lighter than Light
- LM:** Light Medium
- M:** Medium

## Basic Series

1-3 digit number that identifies maximum bore range

## Additional Features\*

- R:** Conforms to ABMA Standard
- G:** Case Carburized Cups & Cone

\*NSK uses these two standard suffixes. Either one or two letter suffixes may appear.



**LM**

**1**

**19**

**49**

**R**

## Code Included Cup Angle

- |          |                             |                 |
|----------|-----------------------------|-----------------|
| <b>1</b> | 0                           | to 23°59'59.99" |
| <b>2</b> | 24°                         | to 25°29'59.99" |
| <b>3</b> | 25°30'                      | to 26°59'59.99" |
| <b>4</b> | 27°                         | to 28°29'59.99" |
| <b>5</b> | 28°30'                      | to 30°29'59.99" |
| <b>6</b> | 30°30'                      | to 32°29'59.99" |
| <b>7</b> | 32°30'                      | to 35°59'59.99" |
| <b>8</b> | 36°                         | to 44°59'59.99" |
| <b>9</b> | 45° up, but not thrust only |                 |

## Design Number

2 digits which identify the cup or cone

Please refer to the bearing tables for exact part number options

## Interchange

Description		Interchange			
		NSK	SKF	Timken	FAG
Prefix	Extra Heavy	EH	EH	EH	KEH
	Heavier Than Heavy	HH	HH	HH	KHH
	Heavy	H	H	H	KH
	Heavy Medium	HM	HM	HM	KHM
	Medium	M	M	M	KM
	Light Medium	LM	LM	LM	KLM
	Light	L	L	L	KL
	Lighter Than Light	LL	LL	LL	KLL
	Extra Light	EL	E	L EL	KEL
Cup Angle	0° To 23°59'59.99	1xxxx	1xxxx	1xxxx	1xxxx
	24° To 25°29'59.99	2xxxx	2xxxx	2xxxx	2xxxx
	25°30' To 26°59'59.99	3xxxx	3xxxx	3xxxx	3xxxx
	27° To 28°29'59.99	4xxxx	4xxxx	4xxxx	4xxxx
	28°30' To 30°29'59.99	5xxxx	5xxxx	5xxxx	5xxxx
	30°30' To 32°29'59.99	6xxxx	6xxxx	6xxxx	6xxxx
	32°30' To 35°59'59.99	7xxxx	7xxxx	7xxxx	7xxxx
	36° To 44°59'59.99	8xxxx	8xxxx	8xxxx	8xxxx
	45° Up, But Not Thrust Only	9xxxx	9xxxx	9xxxx	9xxxx
	Conforms To ABMA Standard	R	--	blank	--
	Case Carburized Cup & Cone	G	--	blank	--

The competitive manufacturers are provided for a convenient source of unit substitution. They can be considered interchangeable in most instances, but for special applications, please contact NSK. NSK assumes no liability with respect to errors or omissions.

## Applications

Shown below are some common applications utilizing a tapered roller bearing design. The design allows for combinations of heavy radial and thrust loads with low to moderate speeds. This section covers only single row tapers although NSK manufactures a full line of two and four row tapers as well. For more details on multiple row tapered roller bearings, please contact an NSK representative.


Metric designs function the same as their inch series cousins, the difference lies in the units of measure. NSK metric tapers are standardly supplied with cup and cone together, while inch series bearing are available by the cup, cone, or cup and cone. The applications shown below are for either metric or inch bearings, with the equipment manufacturer choosing the preference of dimensional measurements. Metric tapers are usually found in equipment designed in Europe or Asia.

- › Guide Boxes in Bar and Rod Mills › Pumps and Compressors › Cranes and Hoists › Gears and Drives › Stamping Presses
- › Machine Tool Spindles › Bow Thrusts on Ships › Speed Reducers › Transmissions › Sheaves › Conveyor and Transfer Equipment
- › Construction Equipment › Mining Equipment › Oil Field Equipment › Automotive Front and Rear Axles › Plastic Forming Equipment
- › Agriculture Equipment › Motorcycle Wheels › Pinion Shafts of Differential Gears › Drum Shafts › Crankshafts › Crushers



# Tapered Roller Bearings: Inch Series

Bore Diameter 12.700 – 30.213 mm, .5000 – 1.1895 inch, 1/2 - 1 3/16 fractional inch

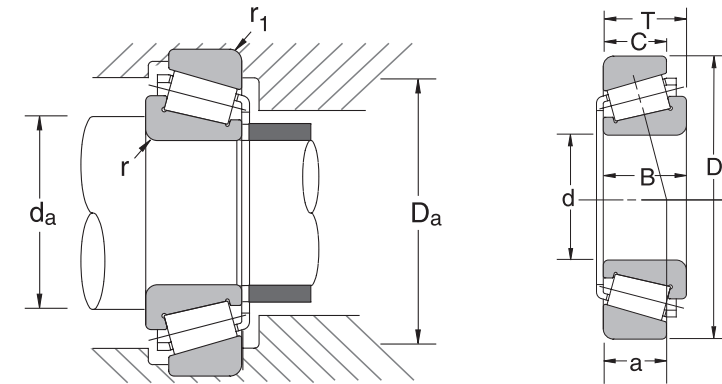

Bearing Number		Basic Bearing Dimensions								
		d Cone		D Cup		T Assembly		B Cone	C Cup	Eff. Load Center a
Cone	Cup	inch	mm	inch	mm	inch	mm	inch	inch	inch
A4050	A4138	0.5000	12.700	1.3775	34.988	0.4330	10.998	0.4326	0.3437	0.33
A4059	A4138	0.5906	15.000	1.3775	34.988	0.4330	10.998	0.4326	0.3437	0.33
A6062	A6157	0.6250	15.875	1.5745	39.992	0.4730	12.014	0.4391	0.3750	0.41
11590	11520	0.6250	15.875	1.6875	42.862	0.5625	14.288	0.5625	0.3750	0.52
A6067	A6157	0.6690	16.993	1.5745	39.992	0.4730	12.014	0.4391	0.3750	0.41
LM11749	LM11710	0.6875	17.462	1.5700	39.878	0.5450	13.843	0.5750	0.4200	0.34
A6075	A6157	0.7500	19.050	1.5745	39.992	0.4730	12.014	0.4391	0.3750	0.41
LM11949	LM11910	0.7500	19.050	1.7810	45.237	0.6100	15.494	0.6550	0.4750	0.39
05075	05185	0.7500	19.050	1.8504	47.000	0.5662	14.381	0.5662	0.4375	0.41
09067	09195	0.7500	19.050	1.9380	49.225	0.7100	18.034	0.7500	0.5625	0.42
09078	09195	0.7500	19.050	1.9380	49.225	0.7813	19.845	0.8480	0.5625	0.42
09067	09196	0.7500	19.050	1.9380	49.225	0.8350	21.209	0.7500	0.6875	0.55
09074	09194	0.7500	19.050	1.9380	49.225	0.9063	23.020	0.8480	0.6875	0.55
05079	05185	0.7874	20.000	1.8504	47.000	0.5662	14.381	0.5662	0.4375	0.41
M12649	M12610	0.8437	21.430	1.9687	50.005	0.6900	17.526	0.7200	0.5500	0.44
LM12749	LM12710	0.8661	22.000	1.7810	45.237	0.6100	15.494	0.6550	0.4750	0.40
LM12749	LM12711	0.8661	22.000	1.8110	46.000	0.6100	15.494	0.6550	0.4750	0.40
07087	07196	0.8750	22.225	1.9687	50.005	0.5313	13.495	0.5614	0.3750	0.42
07098	07204	0.9835	24.981	2.0470	51.994	0.5910	15.011	0.5614	0.5000	0.48
07097	07196	0.9843	25.000	1.9687	50.005	0.5313	13.495	0.5614	0.3750	0.42
07097	07204	0.9843	25.000	2.0470	51.994	0.5910	15.011	0.5614	0.5000	0.48
07100	07196	1.0000	25.400	1.9687	50.005	0.5313	13.495	0.5614	0.3750	0.42
L44643	L44610	1.0000	25.400	1.9800	50.292	0.5600	14.224	0.5800	0.4200	0.43
15101	15245	1.0000	25.400	2.4409	62.000	0.7500	19.050	0.8125	0.5625	0.52
15100	15250X	1.0000	25.400	2.5000	63.500	0.8125	20.638	0.8125	0.6250	0.58
23100	23256	1.0000	25.400	2.5625	65.088	0.8750	22.225	0.8450	0.6250	0.79
L44649	L44610	1.0625	26.988	1.9800	50.292	0.5600	14.224	0.5800	0.4200	0.43
L45449	L45410	1.1417	29.000	1.9800	50.292	0.5600	14.224	0.5800	0.4200	0.43
15117	15245	1.1811	30.000	2.4409	62.000	0.7500	19.050	0.8125	0.5625	0.52
15117	15250	1.1811	30.000	2.5000	63.500	0.8125	20.638	0.8125	0.6250	0.58
M86649	M86610	1.1875	30.162	2.5312	64.292	0.8438	21.433	0.8438	0.6563	0.71
15118	15245	1.1895	30.213	2.4409	62.000	0.7500	19.050	0.8125	0.5625	0.52

Bearing Number		Preferred Shoulder Diameters									
		Cone (r*) (inch)	Cup (r*) (inch)	d <sub>s</sub> (inch)		D <sub>s</sub> (inch)		Basic Load Ratings (lbf)		Approximate Component Weight (lbs)	
Cone	Cup			max	min	min	max	C <sub>r</sub>	C <sub>0r</sub>	Cone	Cup
A4050	A4138	0.05	0.05	0.73	0.67	1.14	1.26	2640	2450	0.07	0.05
A4059	A4138	0.03	0.05	0.77	0.75	1.14	1.26	2640	2450	0.07	0.05
A6062	A6157	0.05	0.05	0.87	0.81	1.34	1.46	3360	3530	0.09	0.07
11590	11520	0.06	0.06	0.96	0.89	1.36	1.56	3890	3860	0.13	0.09
A6067	A6157	0.03	0.05	0.87	0.83	1.34	1.46	3360	3530	0.09	0.07
LM11749	LM11710	0.05	0.05	0.91	0.85	1.34	1.46	5060	5050	0.12	0.06
A6075	A6157	0.04	0.05	0.94	0.91	1.34	1.46	3360	3530	0.08	0.07
LM11949	LM11910	0.05	0.05	0.98	0.93	1.56	1.63	6410	6500	0.18	0.10
05075	05185	0.05	0.05	0.98	0.93	1.59	1.67	5360	5370	0.16	0.10
09067	09195	0.05	0.05	1.00	0.94	1.65	1.75	8000	7950	0.24	0.14
09078	09195	0.05	0.05	1.00	0.94	1.65	1.75	8000	7950	0.27	0.14
09067	09196	0.05	0.06	1.00	0.94	1.63	1.75	8000	7950	0.24	0.19
09074	09194	0.06	0.14	1.02	0.94	1.54	1.75	8000	7950	0.26	0.18
05079	05185	0.06	0.05	1.04	0.94	1.59	1.67	5360	5370	0.15	0.10
M12649	M12610	0.05	0.05	1.08	1.00	1.73	1.81	8680	9020	0.24	0.13
LM12749	LM12710	0.05	0.05	1.08	1.02	1.56	1.63	6570	7500	0.17	0.08
LM12749	LM12711	0.05	0.05	1.08	1.02	1.57	1.67	6570	7500	0.17	0.09
07087	07196	0.05	0.04	1.12	1.06	1.75	1.85	10000	12500	0.21	0.07
07098	07204	0.06	0.05	1.22	1.14	1.77	1.89	10000	12500	0.18	0.13
07097	07196	0.06	0.04	1.22	1.14	1.75	1.85	10000	12500	0.21	0.07
07097	07204	0.06	0.05	1.22	1.14	1.77	1.89	10000	12500	0.21	0.13
07100	07196	0.04	0.04	1.20	1.16	1.75	1.85	10000	12500	0.18	0.07
L44643	L44610	0.05	0.05	1.24	1.16	1.75	1.85	6210	7190	0.19	0.08
15101	15245	0.03	0.05	1.28	1.24	2.17	2.28	10400	11900	0.47	0.18
15100	15250X	0.14	0.06	1.50	1.24	2.17	2.32	10400	11900	0.47	0.25
23100	23256	0.06	0.06	1.54	1.36	2.09	2.48	10100	10700	0.46	0.31
L44649	L44610	0.14	0.05	1.48	1.22	1.75	1.85	6210	7190	0.17	0.08
L45449	L45410	0.14	0.05	1.56	1.30	1.75	1.89	6010	7670	0.17	0.08
15117	15245	0.05	0.05	1.44	1.38	2.17	2.28	10400	11900	0.40	0.18
15117	15250	0.05	0.05	1.44	1.38	2.20	2.32	10400	11900	0.40	0.25
M86649	M86610	0.06	0.06	1.61	1.50	2.13	2.40	11500	14500	0.46	0.28
15118	15245	0.14	0.05	1.63	1.40	2.17	2.28	10400	11900	0.39	0.18


\*Maximum fillet which corner radius of bearing will clear.

C<sub>r</sub> = Dynamic Radial Load Rating

C<sub>0r</sub> = Static Radial Load Rating

# Tapered Roller Bearings: Inch Series (cont.)

Bore Diameter 31.750 – 45.242 mm, 1.2500 – 1.7812 inch, 1 1/4 - 1 25/32 fractional inch

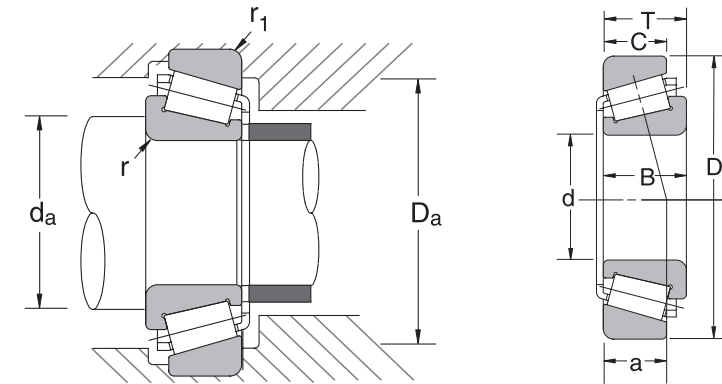

Bearing Number		Basic Bearing Dimensions								
		d Cone		D Cup		T Assembly		B Cone	C Cup	Eff. Load Center a
		inch	mm	inch	mm	inch	mm	inch	inch	inch
LM67048	LM67010	1.2500	31.750	2.3280	59.131	0.6250	15.875	0.6600	0.4650	0.51
15123	15245	1.2500	31.750	2.4409	62.000	0.7150	18.161	0.7500	0.5625	0.52
15125	15245	1.2500	31.750	2.4409	62.000	0.7500	19.050	0.8125	0.5625	0.52
15126	15245	1.2500	31.750	2.4409	62.000	0.7500	19.050	0.8125	0.5625	0.52
15126	15250	1.2500	31.750	2.5000	63.500	0.8125	20.638	0.8125	0.6250	0.58
14125A	14276	1.2500	31.750	2.7170	69.012	0.7813	19.845	0.7710	0.6250	0.61
14123A	14274	1.2500	31.750	2.7170	69.012	1.0625	26.982	1.0520	0.6250	0.61
M88048	M88010	1.3125	33.338	2.6875	68.262	0.8750	22.225	0.8750	0.6875	0.76
14130	14274	1.3125	33.338	2.7170	69.012	0.7813	19.845	0.7710	0.6250	0.61
LM48548	LM48510	1.3750	34.925	2.5625	65.088	0.7100	18.034	0.7200	0.5500	0.56
14136A	14276	1.3750	34.925	2.7170	69.012	1.0625	26.982	1.0520	0.6250	0.61
14137A	14276	1.3750	34.925	2.7170	69.012	0.7813	19.845	0.7710	0.6250	0.61
14138A	14276	1.3750	34.925	2.7170	69.012	0.7813	19.845	0.7710	0.6250	0.61
25877	25821	1.3750	34.925	2.8750	73.025	0.9375	23.812	0.9688	0.7500	0.62
L68149	L68110	1.3780	35.000	2.3280	59.131	0.6250	15.875	0.6600	0.4700	0.53
L68149	L68111	1.3780	35.000	2.3622	60.000	0.6250	15.875	0.6600	0.4700	0.53
HM89449	HM89410	1.4375	36.512	3.0000	76.200	1.1563	29.370	1.1250	0.9063	0.94
JL69349	JL69310	1.4961	38.000	2.4803	63.000	0.6693	17.000	0.6693	0.5315	0.57
LM29749	LM29710	1.5000	38.100	2.5625	65.088	0.7100	18.034	0.7200	0.5500	0.54
2788	2729	1.5000	38.100	3.0000	76.200	0.9375	23.812	1.0100	0.7500	0.62
2788	2720	1.5000	38.100	3.0000	76.200	0.9375	23.812	1.0100	0.7500	0.62
18590	18520	1.6250	41.275	2.8750	73.025	0.6562	16.667	0.6875	0.5000	0.55
LM501349	LM501310	1.6250	41.275	2.8910	73.431	0.7700	19.558	0.7800	0.5800	0.64
LM501349	LM501314	1.6250	41.275	2.8910	73.431	0.8437	21.430	0.7800	0.6537	0.71
26882	26822	1.6250	41.275	3.1250	79.375	0.9375	23.812	1.0000	0.7500	0.64
342	332	1.6250	41.275	3.1496	80.000	1.1250	28.575	1.1801	0.7018	0.58
25577	25523	1.6880	42.875	3.2650	82.931	1.0625	26.988	1.0000	0.8750	0.82
25580	25520	1.7500	44.450	3.2650	82.931	0.9375	23.812	1.0000	0.7500	0.69
3578	3525	1.7500	44.450	3.4375	87.312	1.1875	30.162	1.2160	0.9375	0.79
3782	3720	1.7500	44.450	3.6718	93.264	1.1875	30.162	1.1930	0.9375	0.87
LM102949	LM102910	1.7812	45.242	2.8910	73.431	0.7700	19.558	0.7800	0.6200	0.59
LM603049	LM603011	1.7812	45.242	3.0625	77.788	0.7812	19.842	0.7812	0.5937	0.69

Bearing Number		Preferred Shoulder Diameters									
		Cone (r*) (inch)	Cup (r*) (inch)	d <sub>s</sub> (inch)		D <sub>s</sub> (inch)		Basic Load Ratings (lbf)		Approximate Component Weight (lbs)	
				max	min	min	max	C <sub>r</sub>	C <sub>sr</sub>	Cone	Cup
LM67048	LM67010	0.14	0.05	1.67	1.42	2.05	2.20	7800	9300	0.26	0.14
15123	15245	0.14	0.05	1.67	1.44	2.17	2.28	10400	11900	0.34	0.18
15125	15245	0.14	0.05	1.67	1.44	2.17	2.28	10400	11900	0.36	0.18
15126	15245	0.03	0.05	1.46	1.44	2.17	2.28	10400	11900	0.37	0.18
15126	15250	0.03	0.05	1.46	1.44	2.2	2.32	10400	11900	0.37	0.25
14125A	14276	0.14	0.05	1.73	1.48	2.36	2.48	10600	12600	0.48	0.29
14123A	14274	0.16	0.13	1.63	1.48	2.32	2.48	10600	12600	0.57	0.29
M88048	M88010	0.05	0.06	1.67	1.62	2.28	2.56	12500	15900	0.51	0.20
14130	14274	0.14	0.13	1.77	1.52	2.32	2.48	10400	12600	0.45	0.29
LM48548	LM48510	0.14	0.05	1.81	1.57	2.28	2.40	10700	13000	0.36	0.19
14136A	14276	0.03	0.05	1.63	1.57	2.36	2.48	10400	12600	0.50	0.29
14137A	14276	0.06	0.05	1.65	1.57	2.36	2.48	10400	12600	0.42	0.29
14138A	14276	0.14	0.05	1.81	1.57	2.36	2.48	10400	12600	0.42	0.29
25877	25821	0.06	0.03	1.69	1.59	2.56	2.68	16000	19300	0.67	0.36
L68149	L68110	0.14	0.05	1.79	1.54	2.05	2.20	7830	10500	0.24	0.12
L68149	L68111	0.14	0.05	1.79	1.54	2.09	2.20	7830	10500	0.24	0.14
HM89449	HM89410	0.14	0.13	2.13	1.76	2.44	2.87	17600	23900	0.83	0.55
JL69349	JL69310	0.14	0.05	1.85	1.63	2.20	2.41	8600	11700	0.29	0.13
LM29749	LM29710	0.09	0.05	1.81	1.67	2.32	2.44	9480	12400	0.34	0.17
2788	2729	0.14	0.03	1.97	1.71	2.68	2.76	16500	20500	0.68	0.41
2788	2720	0.14	0.13	1.97	1.71	2.60	2.76	16500	20500	0.68	0.41
18590	18520	0.14	0.06	2.09	1.81	2.60	2.72	10000	120800	0.45	0.19
LM501349	LM501310	0.14	0.03	2.09	1.83	2.64	2.76	12200	15100	0.48	0.24
LM501349	LM501314	0.14	0.03	2.09	1.83	2.60	2.76	12200	15100	0.48	0.28
26882	26822	0.14	0.03	2.13	1.85	2.80	2.91	16200	20900	0.75	0.41
342	332	0.14	0.05	2.09	1.81	2.87	2.95	15300	12100	0.92	0.32
25577	25523	0.14	0.09	2.17	1.93	2.83	3.03	17200	22200	0.83	0.54
25580	25520	0.14	0.03	2.24	1.97	2.91	3.03	17200	22200	0.78	0.41
3578	3525	0.14	0.13	2.24	2.01	2.95	3.19	21600	26900	1.04	0.67
3782	3720	0.14	0.03	2.28	2.05	3.23	3.46	23200	30700	1.47	0.64
LM102949	LM102910	0.14	0.03	2.20	1.97	2.68	2.76	12000	16900	0.45	0.22
LM603049	LM603011	0.14	0.03	2.24	1.97	2.80	2.91	12600	16000	0.53	0.27


\*Maximum fillet which corner radius of bearing will clear.

C<sub>r</sub> = Dynamic Radial Load Rating

C<sub>sr</sub> = Static Radial Load Rating

# Tapered Roller Bearings Inch Series (cont.)

Bore Diameter 45.242 – 92.075mm, 1.7812 – 3.625 inch, 1 <sup>25</sup>/<sub>32</sub> – 3 <sup>5</sup>/<sub>8</sub> fractional inch

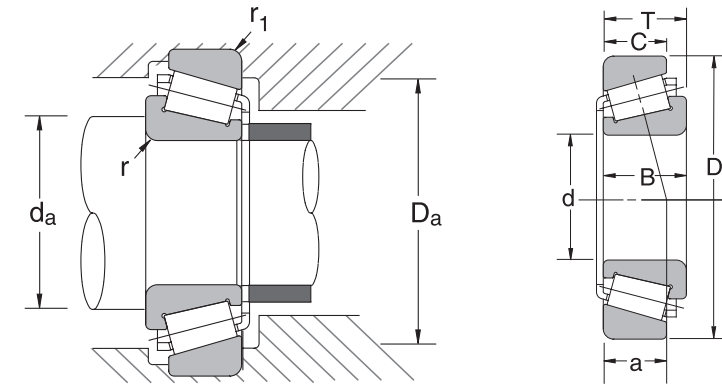

Bearing Number		Basic Bearing Dimensions								
		d Cone		D Cup		T Assembly		B Cone	C Cup	Eff. Load Center a
		inch	mm	inch	mm	inch	mm	inch	inch	inch
LM603049	LM603012	1.7812	45.242	3.0625	77.788	0.8437	21.430	0.7812	0.6562	0.75
25590	25520	1.7960	45.618	3.2650	82.931	0.9375	23.812	1.0000	0.7500	0.69
25590	25523	1.7960	45.618	3.2650	82.931	1.0625	26.988	1.0000	0.8750	0.82
18690	18620	1.8125	46.038	3.1250	79.375	0.6875	17.462	0.6875	0.5313	0.61
368A	362A	2.0000	50.800	3.5000	88.900	0.8125	20.638	0.8750	0.6501	0.65
368A	362A	2.0000	50.800	3.5000	88.900	0.8125	20.638	0.8750	0.6501	0.65
387A	382A	2.2500	57.150	3.8125	96.838	0.8268	21.000	0.8640	0.6250	0.71
387A	382A	2.2500	57.150	3.8750	98.425	0.8268	21.000	0.8640	0.7018	0.71
3982	3920	2.5000	63.500	4.4375	112.712	1.1875	30.162	1.1830	0.9375	1.01
39585	39520	2.5000	63.500	4.4375	112.712	1.1875	30.162	1.1875	0.9375	0.93
HM212047	HM212011	2.5000	63.500	4.8125	122.238	1.5000	38.100	1.5100	1.1700	1.07
3984	3920	2.6250	66.675	4.4375	112.712	1.1875	30.162	1.1830	0.9375	1.01
39590	39520	2.6250	66.675	4.4375	112.712	1.1875	30.162	1.1875	0.9375	0.93
560	553X	2.6250	66.675	4.8125	122.238	1.5000	38.100	1.4440	1.1875	1.13
560	552A	2.6250	66.675	4.8750	123.825	1.5000	38.100	1.4400	1.1875	1.13
33287	33462	2.8750	73.025	4.6250	117.475	1.1875	30.162	1.1875	0.9375	1.08
567	563	2.8750	73.025	5.0000	127.000	1.4375	36.512	1.4240	1.1250	1.12
495	493	3.0000	76.200	5.3750	136.525	1.1875	30.162	1.1720	0.8750	1.16
575	572	3.0000	76.200	5.5115	139.992	1.4375	36.512	1.4212	1.1250	1.23
47686	47620	3.2500	82.550	5.2500	133.350	1.3125	33.338	1.3125	1.0313	1.14
580	572	3.2500	82.550	5.5115	139.992	1.4375	36.512	1.4212	1.1250	1.23
663	653	3.2500	82.550	5.7500	146.050	1.6250	41.275	1.6250	1.2500	1.31
749	742	3.3475	85.027	5.9090	150.089	1.7502	44.455	1.8375	1.4375	1.28
497	493	3.3750	85.725	5.3750	136.525	1.1875	30.162	1.1720	1.8750	1.16
665A	653	3.3750	85.725	5.7500	146.050	1.6250	41.275	1.6250	1.2500	1.31
593	592A	3.5000	88.900	6.0000	152.400	1.5625	39.688	1.4300	1.1875	1.46
598	592A	3.6250	92.075	6.0000	152.400	1.5625	39.688	1.4300	1.1875	1.46
598A	592A	3.6250	92.075	6.0000	152.400	1.5625	39.688	1.4300	1.1875	1.46

Bearing Number		Preferred Shoulder Diameters									
		Cone (r <sup>*</sup> ) (inch)	Cup (r <sup>*</sup> ) (inch)	d <sub>s</sub> (inch)		D <sub>s</sub> (inch)		Basic Load Ratings (lbf)		Approximate Component Weight (lbs)	
				max	min	min	max	C <sub>r</sub>	C <sub>0r</sub>	Cone	Cup
LM603049	LM603012	0.14	0.03	2.24	1.97	2.76	2.91	12600	16000	0.53	0.31
25590	25520	0.14	0.03	2.28	2.01	2.91	3.03	17200	22300	0.74	0.44
25590	25523	0.14	0.09	2.28	2.01	2.83	3.03	17200	22300	0.74	0.54
18690	18620	0.11	0.06	2.20	2.01	2.80	2.91	10300	12800	0.45	0.27
368A	362A	0.06	0.05	2.28	2.20	3.19	3.31	16400	19100	0.76	0.36
368A	362A	0.06	0.05	2.44	2.20	3.19	3.31	16400	19100	0.75	0.36
387A	382A	0.14	0.03	2.72	2.44	3.50	3.62	16400	20100	0.88	0.39
387A	382A	0.14	0.03	2.72	2.44	3.54	3.62	16400	20100	0.88	0.50
3982	3920	0.14	0.13	3.03	2.80	3.90	4.17	27000	39800	1.71	0.99
39585	39520	0.14	0.13	3.03	2.80	3.98	4.21	54900	91000	1.97	0.79
HM212047	HM212011	0.28	0.13	3.43	2.87	4.25	4.57	42300	55100	3.17	1.31
3984	3920	0.14	0.13	3.15	2.91	3.90	4.17	27000	39800	1.54	0.99
39590	39520	0.14	0.13	3.15	2.91	3.98	4.21	31900	45400	1.79	0.79
560	553X	0.14	0.13	3.19	2.95	4.25	4.53	41800	68600	2.51	1.51
560	552A	0.14	0.13	3.19	2.95	4.29	4.57	41800	68600	2.51	1.67
33287	33462	0.14	0.13	3.43	3.15	4.09	4.41	26800	40200	1.62	0.97
567	563	0.14	0.13	3.46	3.19	4.41	4.72	37300	52600	2.54	1.44
495	493	0.25	0.13	3.86	3.39	4.80	5.12	29200	43200	2.60	1.21
575	572	0.14	0.13	3.62	3.39	4.92	5.24	39300	58400	3.53	1.78
47686	47620	0.14	0.13	3.82	3.54	4.69	5.04	33900	53100	2.51	1.27
580	572	0.14	0.13	3.86	3.58	4.92	5.24	93300	51900	3.02	1.78
663	653	0.14	0.13	3.90	3.62	5.16	5.47	46500	66500	4.12	1.95
749	742	0.14	0.13	3.98	3.74	5.28	5.59	59600	83200	4.76	2.34
497	493	0.14	0.13	3.90	3.66	4.80	5.12	29200	43200	2.16	1.21
665A	653	0.25	0.13	4.21	3.74	5.16	5.47	46500	66500	3.77	1.95
593	592A	0.14	0.13	4.09	3.86	5.31	5.67	41100	64100	3.77	2.31
598	592A	0.14	0.13	4.21	3.98	5.31	5.67	41100	64100	3.44	2.31
598A	592A	0.25	0.13	4.45	3.98	5.31	5.67	41100	64100	3.46	2.31

\*Maximum fillet which corner radius of bearing will clear.

C<sub>r</sub> = Dynamic Radial Load Rating

C<sub>0r</sub> = Static Radial Load Rating

